



## DESCRIPTION

The **I420** from IOTA Engineering is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the **I420** switches to the emergency mode and operates **one or two** of the existing lamps for **90 minutes**. The unit contains a battery, charger, and inverter circuit in a single can. The **I420** can be used with most 10W-57W twin, triple, quad tube, 2D and Straight **4-pin** compact fluorescent lamps, with an initial output of up to **1100 lumens** for one or two lamps. **The I420 utilizes AC output to ensure compatibility with new lamp technologies**, and features lamp selector leads for optimizing light output for designated lamp types. The **I420** is available in dual flex **A**, no flex **B**, and single flex **J** mounting configurations. The **I420** is suitable for use in damp locations and enclosed and gasketed fixtures.


## SPECIFICATIONS

Input Voltage .....	(Dual) 120/277V, 60Hz
Input Wattage .....	3.5 Watts
Lamps Operated .....	10W-57W <b>4-pin</b> Rapid Start Compact Lamps including Twin, Triple, Quad Tube, 2D & Straight
Emergency Operation .....	(1) 10W-57W or (2) 10W-26W 90 minutes
Initial Illumination .....	1100 lumens (2) lamps 550 lumens each lamp
Operating Temp .....	0° to 50° C
Battery .....	24 Hour Recharge 7-10 Year Life Expectancy
Weight (configuration) .....	5.4 lbs. (A) 3.5 lbs. (B) 4.5 lbs. (J)
Certifications .....	UL and CUL Listed



## DIMENSIONS

13.3" x 2.4" x 1.5" (mounting center 12.75")

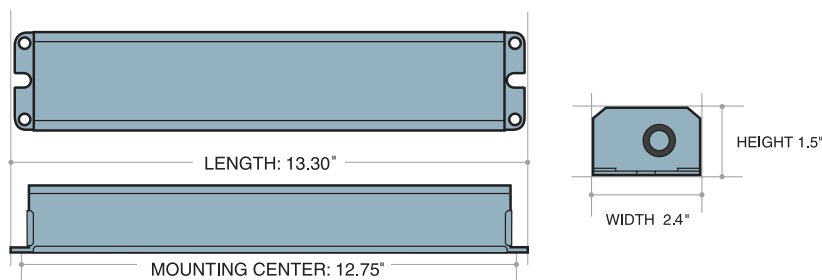

MODEL NO: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

COMMENTS: \_\_\_\_\_

## INITIAL LUMEN OUTPUT

1100 Lumens

## LAMPS OPERATED\*




[1] 10W-57W 4-PIN Compact [2] 10W-26W 4-PIN Compact

\*Refer to Lumen Reference Chart for list of compatible lamps

## PRODUCT ADVANTAGES

- **AC output for compatibility with Low-Mercury Content Amalgam lamps**
- **Time Delay feature for compatibility with End-of-Lamp-Life Circuitry**
- **Open Circuit Isolation protects unit when load is absent**
- **Different mounting configurations available**

## FEATURES

- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Galvanized steel case
- Includes test switch and charge indicator accessory kit
- For use with switched or unswitched fixtures
- **5-Year Warranty**
- Lamp selector leads optimize light output for designated lamp type
- Rated for use in damp locations, plenum, and enclosed and gasketed fixtures
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- RoHS Compliant 
- International Voltage Model available



# I420

FLUORESCENT EMERGENCY BALLAST FOR 4-PIN LAMPS

## CONFIGURATION

	Mounting Style	Input Voltage	Example Models: I420 A I42 B 220V50
<b>I420</b>	<div><div>A Dual Flex</div><div>B Integral (No Flex)</div><div>J Junction Box</div><div>R Reflector</div><div>RJ Reflector/Junction Box</div></div>	<div><div>[blank] (Dual) 120/277, 60Hz</div><div>220V50** 220V, 50Hz</div><div>**Only available with B (No Flex) models</div></div>	

### I420 A SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA I420 A** fluorescent emergency battery pack. The **I420 A** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 13.3" x 2.4" x 1.5" vandal-resistant galvanized steel case. The unit is designed for installation on top of the fixture and is equipped with 1/2" flex for wiring to the fixture or ballast compartment. A combination one-piece long-life LED charge indicator light and test switch shall be included. The fluorescent EM pack shall operate one 10W-57W or two 10W-26W twin, triple, quad tube, 2D or straight **4-pin** fluorescent lamps. The **I420 A** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 1100 lumens. **The I420 A will operate the lamp with AC output** and will feature lamp selector leads for optimizing light output for the designated lamp type. The **I420 A** shall have 4 watts of input power and a battery capacity of 24 watt hours. The **I420 A** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements, and rated for use in damp locations. The **I420 A** is warranted for a full five (5) years from the date of purchase.

### I420-EM-B SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA I420 B** fluorescent emergency battery pack. The **I420 B** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 13.3" x 2.4" x 1.5" vandal-resistant galvanized steel case for installation in the wireway or on top of the fixture. A combination one-piece long-life LED charge indicator light and test switch shall be included. The fluorescent EM pack shall operate one 10W-57W or two 10W-26W twin, triple, quad tube, 2D or straight **4-pin** fluorescent lamps. The **I420 B** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 1100 lumens. **The I420 B will operate the lamp with AC output** and will feature lamp selector leads for optimizing light output for the designated lamp type. The **I420 B** shall have 4 watts of input power and a battery capacity of 24 watt hours. The **I420 B** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements, and rated for use in damp locations. The **I420 B** is warranted for a full five (5) years from the date of purchase.

### INITIAL LUMEN RATINGS

LAMP	1 LAMP	2 LAMPS
13W PL CF 4-PIN	570	900
18W PL CF QUAD 4-PIN	680	1010
26W PL CF QUAD 4-PIN	810	1200
32W PL CF QUAD 4-PIN	910	
42W PL CF QUAD 4-PIN	1040	
57W PL CF QUAD 4-PIN	1180	

### REMOTE MOUNTING

When battery packs are remote mounted, consult Customer Service for the maximum allowable distance between the battery pack and lamp(s).

**Warranty:** 5-Year Limited Warranty  
Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)