



ADVENTURE POWER[®]

UPG No. 42522

UB12C-A Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.



Specification

| | |
|---|-------------------------------|
| Nominal Voltage | 12 Volts |
| Nominal Capacity (10H-R) | 12 Ah |
| Approximate Weight (With Acid) | 8.60 lbs. (3.9 kgs) |
| Recommended Maximum Charging Current Limit | 3.6A |
| Equalization and Cycle Service | 14.8 VDC/unit Average at 25°C |
| Cycle Life (JIS D 5302:2004) | 250 |
| Terminal Type | D |

Physical Dimensions: in (mm)

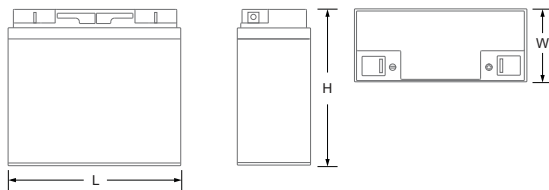

L: 5.24" (133mm) H: 6.89" (175mm) W: 3.15" (80mm)
All data subject to change without notice.

Terminal Configuration



Polarity



Exhaust



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer[®] Maintainer 4000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com