


Read These Instructions Completely and Carefully


WARNING

Risk of electric shock

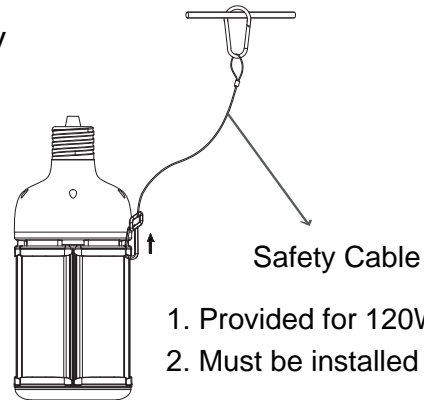

- 1. Provided for 120W only
- 2. Must be installed for safety purpose


- Disconnect electrical power to fixture and follow proper lockout/tag out procedures before installation or maintenance. Contact a qualified electrician for installation.
- This device requires 120V-277VAC input voltage.
- This device requires all ballasts, capacitors, and starters to be bypassed/removed.
- Suitable for use in damp locations. DO NOT use where directly exposed to liquid, vapor, rain.
- Added weight of the device may cause instability of a free-standing portable luminaire.
- This device is not intended for use with emergency exits.
- This device is not intended for use with dimmers or remote controls.
- This device is suitable for enclosed fixtures, minimum lamp compartment dimensions:
 60W-100W: 11.81" (L) x 11.81" (W)
 120W: 15.75" (L) x 15.75" (W)

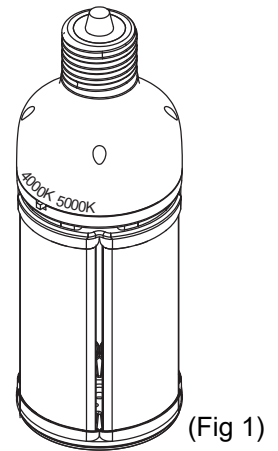

FOR CCT SELECTABLE SKUS

- CCT selectable: 4000K or 5000K for choice by DIP switch (Fig 1)
- NOTE: PLEASE SELECT THE DESIRED CCT BEFORE LIGHTING THE LAMPS.

WIRING DIAGRAM

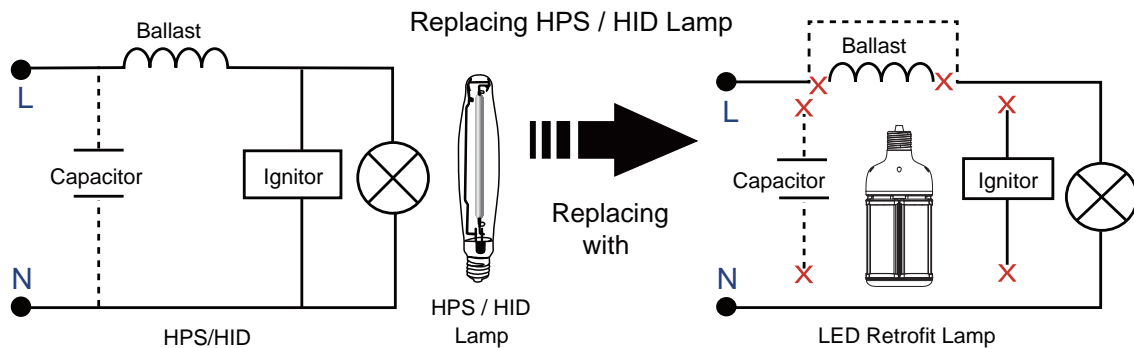

Any further questions or interests, please visit