



Questions?

For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
E-mail: info@eurilighting.com





LED Linear Suspended
Up & Down light

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

WARNINGS

- Please read the specification before install, to make sure the service environment matches the condition in the specification.
- Please confirm the applicable power supply before using it.
- Make sure the switch of the product is off before connected to the power supply to prevent electric shock.
- The operation against rules may damage your property even harm to your personal safety.
- Preliminarily estimate the required quantity of LED linear lights, then according to the power rating of single linear light to figure out the total power and design power supply plan.
- Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personals to avoid dangers.


INSTRUCTIONS

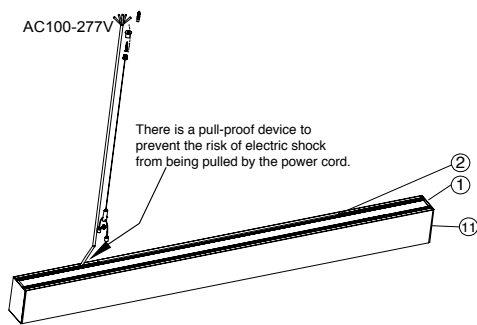


BOM		④	Steel wire rope ø1.5*130mm 2PCS	⑧	Screw ø4*30mm 2PCS
①	Lamp 1PCS	⑤	Locking wire buckle ø8*15 4PCS	⑨	Fastening head2 ø12*25*1.2mm 2PCS
②	Screw 4*8mm 4PCS	⑥	Steel wire rope ø1.5*2000mm 2PCS	⑩	Rubber plug ø6*27mm 2PCS
③	Fastening head ø9*16 4PCS	⑦	Fastening head 1 ø10*18mm 2PCS	⑪	End cap

ELECTRICAL CONNECTION


DIM+(purple)
DIM-(gray)
GND(yellow and green)
N (white)
L (black)

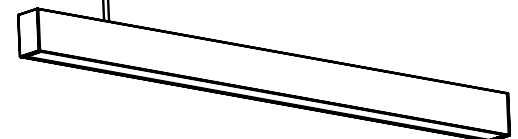


INSTALLATION OF LED LINEAR SUSPENDED UP & DOWN LIGHT




1 Drill a hole of 5.0mm in diameter as shown in the figure at the location required for installation. Then hammer the plastic anchor into the hole.

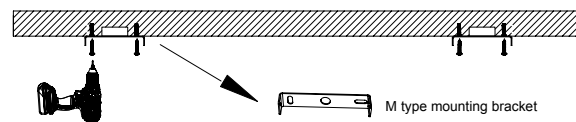

2 Insert PA4*35 screws into the M type mounting bracket and then drill into the plastic anchor.

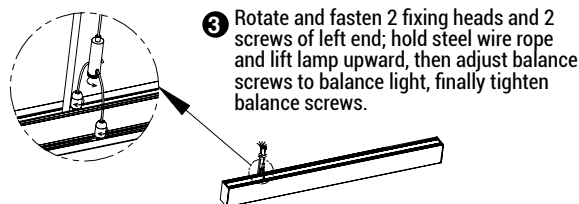

3 Rotate and fasten 2 fixing heads and 2 screws of left end; hold steel wire rope and lift lamp upward, then adjust balance screws to balance light, finally tighten balance screws.



4 Insert the wire clamp into the middle hole of the disc and tighten the wire clamp with hex nut; Clip the cable protective cover into the AC line hole of the disc.



Questions?


For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
E-mail: info@eurilighting.com




LED Linear Suspended
Up & Down light

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION


INSTALLATION OF LED LINEAR SUSPENDED UP & DOWN LIGHT

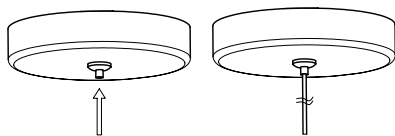


5 Press the wire clamp as shown in the figure, and then insert the stainless steel wire into the inner hole of the wire clamp; The mounting height of the lamp could be adjusted by this wire clamp.



6 Insert the AC input cable through the cable protective cover and connect it with the AC line by the corresponding connection wire with L, N, GND.




7 Adjust the length of the AC input cable, align the side holes of the disc and the mounting bracket as shown in the figure, then tighten the screw.

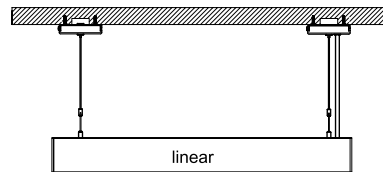


8 The installation is completed.


LINKABLE INSTRUCTION




1 Install the Linear 1 to the ceiling as instruction of Suspension Installation. Open the end cap as the picture shows.




2 Pull out 1/2 Power supply board of Linear 1, and move out the ac wires.




3 Disconnect the A and B parts.




4 Insert the H-shape plate to the track as the picture shows.



5 Install the Linear 2 to the ceiling and open the end cap, connect B and C as the picture shows.

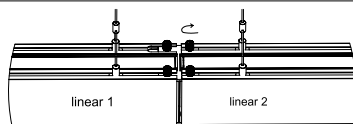



6 Push back Power Supply Board to Linear 1 then insert the H-shape plate to Linear 2, tighten the plate with 4 pcs hand screws.



7 Install the Linear Light as above method, keep one main input cord on one side.

NOTE: LED LINEAR CAN BE JOINTED TOGETHER AS NEEDED, BUT THE TOTAL NUMBER OF FIXTURES SHOULD BE NOT MORE THAN 7PCS (INCLUDING 7PCS) if you order to use 18# cord, More Links can be Customized.

CCT CHANGEABLE

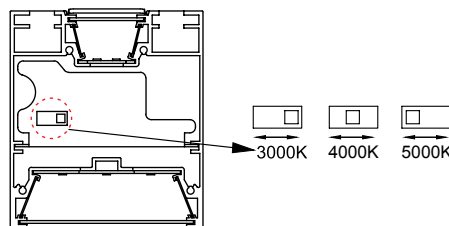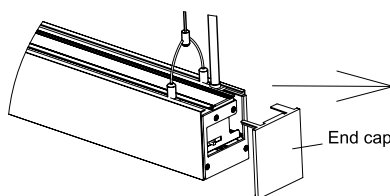

1 Open the end cap the side With AC wire as the picture shows.

2 Moving the Dip to choose the CCT or you want as the label shows.