



### **⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

### **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.

### **⚠ AVERTISSEMENT**

- Avant d'installer, d'entretenir ou d'effectuer une maintenance de routine sur cet équipement, veuillez suivre ces précautions générales.



## LED WRAPAROUND FIXTURE SAFETY AND INSTALLATION INSTRUCTIONS

- Pour réduire le risque de décès, de blessures corporelles ou de dommages matériels dus à un incendie, un choc électrique, des chutes de pièces, des coupures/abrasions et d'autres dangers, lisez tous les avertissements et les instructions inclus avec et sur la boîte du luminaire et toutes les étiquettes des luminaires.
- Une mise à la terre appropriée est requise pour assurer la sécurité.
- L'alimentation doit être coupée au niveau du disjoncteur avant l'installation ou l'entretien de cet équipement.
- Ce produit doit être installé conformément au code d'installation applicable par une personne familière avec la construction et le fonctionnement du produit et les risques impliqués
- Portez des gants et des lunettes de protection à tout moment lors de l'installation, de l'entretien ou de la maintenance du luminaire, et évitez de regarder directement la source lumineuse lorsqu'elle est allumée.
- N'installez pas de produit endommagé. Inspectez le luminaire pour vérifier s'il présente des dommages qui ont pu se produire pendant le transport. S'il est endommagé, contactez immédiatement le fabricant.
- Ces instructions ne prétendent pas couvrir tous les détails ou variations de l'équipement ni fournir toutes les éventualités possibles que vous pourriez rencontrer en rapport avec l'installation, l'exploitation ou la maintenance. Si vous souhaitez des informations supplémentaires ou si des problèmes particuliers surviennent et qu'ils ne sont pas suffisamment couverts pour les besoins de l'acheteur ou du propriétaire, contactez le fabricant.


### WARNING

- If replacing a fixture, remove existing fixture and make a sketch of wiring configuration (by color), or mark wires with masking tape for identification.

### CAUTION

- Be careful not to misplace any of the screws or parts needed for installing the fixture.
- Before beginning installation turn off the circuit breaker and light switch.

### Package Contents

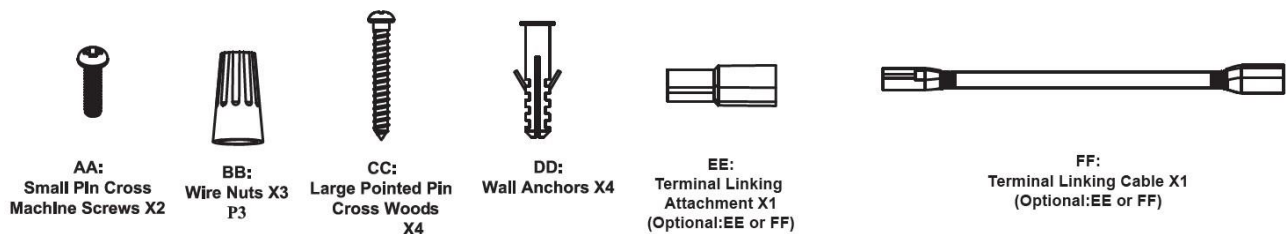



## Parts

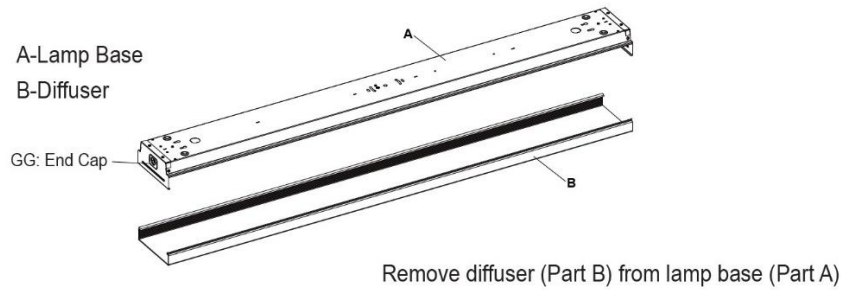


Figure 1

## Installation Instructions

### Junction Box Installation

1. Install the two screws (AA) into the junction box. (Figure 2)  
**NOTE:** Leave 1/4" of screw exposed to accommodate lamp base.
2. Take out the cables from the lamp base. (Figure 3)
3. Remove the heat shrink tubing wrap from the ends of the black, white, and green wires in order to expose the copper wires prior to connecting the AC wires to the corresponding wires (BLACK to BLACK, WHITE to WHITE and GREEN to GREEN) in the junction box and secure using wire nuts (Part BB).

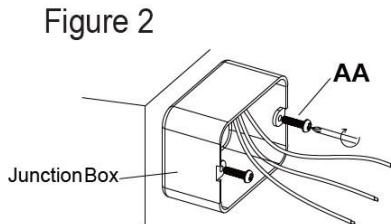


Figure 2

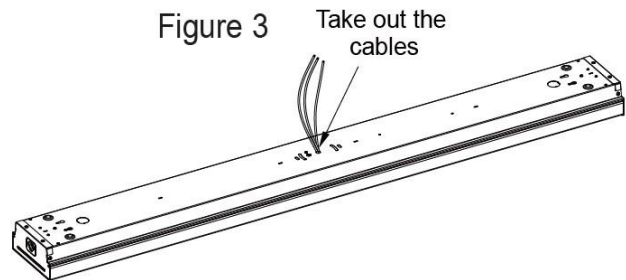


Figure 3

**NOTE:** For proper connection, place the wire nuts (BB) over wires and twist clockwise until tight. (Figure 4)




Figure 4



**OPTIONAL:** Wrap connected wire nuts with electrical tape. *Do not perform this step if you are using this light as a linked light.*

### Attaching Lamp Base

1. Attach the lamp base to the junction box by aligning the holes on the lamp base (Figure 1, Part A) with the screws on the junction box.
2. Turn the lamp base clockwise to lock in place and tighten screws to ensure the fixture is secure and will not move. (Figure 5)

### Attaching the Diffuser

1. To install diffuser (Figure 1, Part B), start at one end of the lamp base and insert diffuser slot onto the edge of the lamp base (Figure 6).
2. Carefully squeeze the diffuser to engage the opposite side with the lamp base. Continue this action down the length of the diffuser until fully installed onto the lamp base. (Figure 6)
3. Turn on the breaker and test the light.

Figure 5


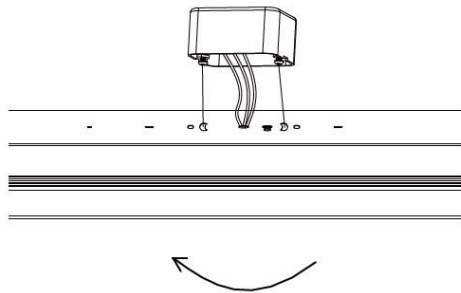


Figure 6

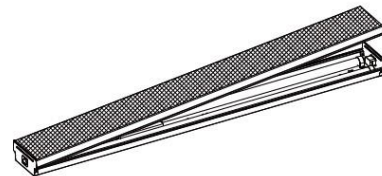

### Keyhole Installation

1. Take out the cables from the lamp base. (Figure 7)
2. Align hole with the supply wire location on the mounting location with one hand while marking the location of the four keyhole slots at each end of the housing. (Figure 8)

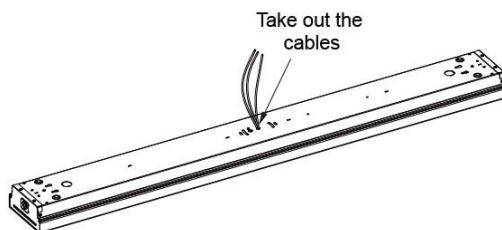


Figure 7

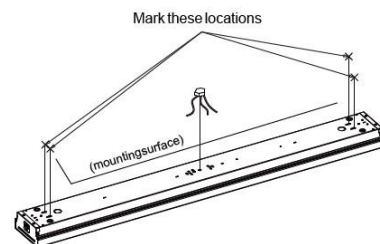


Figure 8

**Drywall Mounting:**

- If the mounting holes go through drywall without a stud, drill four small pilot holes by a 1/8" drill bit (not included) and install wall anchors (DD) into the holes with a hammer (not included). Install the four wood screws (CC) into the mounting surface but leave about a 3/8" gap between the screw head and mounting surface.

**Wall Setup Mounting:**

- If the mounting holes go through wall studs, drill four small pilot holes using a 5/32" drill bit (not included) for the wood screws (CC). Install the four wood screws (CC) into the mounting surface but leave about a 3/8" gap between the screw head and mounting surface. (Figure 9)

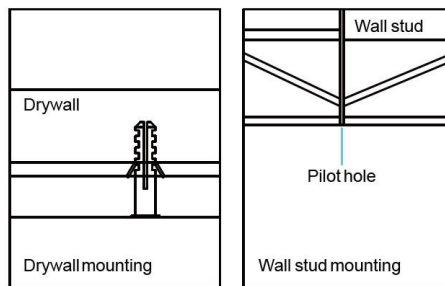


Figure 9

3. Remove the heat shrink tubing wrap from the ends of the black, white, and green wires in order to expose the copper wires prior to connecting the AC wires to the corresponding wires (BLACK to BLACK, WHITE to WHITE and GREEN to GREEN) in the junction box and secure using wire nuts (Part BB). (Figure 10)




Figure10

**NOTE:** For proper connection, place the wire nuts (BB) over wires and twist clockwise until tight. (Figure 10)

**OPTIONAL:** Wrap connected wire nuts with electrical tape. ***Do not perform this step if you are using this light as a linked light.***

- Hide cables with wire nuts in the junction box. Guide the heads of the four wood screws into the keyhole slots and slide the lamp base (Figure 1, Part A) in the direction such that the wood screw heads rest over the narrow part of the keyhole slot. Ensure that the fixture is supported and tighten the four wood screws until the fixture is secured to the mounting surface. (Figure 11)
- To install diffuser (Figure 1, Part B) - starting at one end of lamp base, insert diffuser slot onto edge of lamp base - See Figure 12. Carefully squeeze diffuser to engage opposite side with lamp base. Continue this action down length of diffuser until fully installed onto lamp base. (Figure 12). Turn on breaker and test light function.

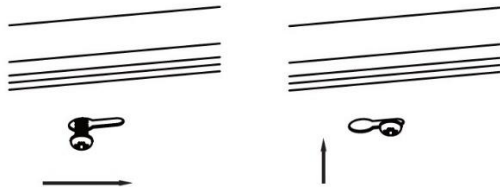


Figure 11




Figure 12

### Connection Options

- Option 1: If linking two or more wraparounds together, power to each subsequent light can be made by using the linking attachment (EE) or the linking cable (FF) where only the first light needs to be electrically hardwired and all linked lights only need to be mechanically secured to the mounting surface.
- Option 2: If no lights are connected, use end cap (Part GG).

### Linking Cable

- Use included linking cable (FF) in situations where lights s/b apart, plug linking cable into end of wraparound light and connect other end to next light. Use included linking attachment (EE) when lights are mounted end to end.

**NOTE:** Linking cable (or linking attachment) will only fit one end of wraparound light. Be sure to match up "F" of connector with "F" of light and "M" of connector with "M" of light. For the first connected product, please ensure the connector connects to the "M" side of the product. (Figure 13)

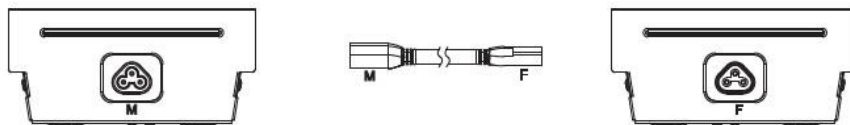


Figure 13

### Operation

#### Testing the Light Fixture

- Turn on the circuit breaker and light switch.  
**NOTE:** When first turned on wait about 1 minute for the circuitry to calibrate.