



# ADVENTURE POWER<sup>®</sup>

UPG No. 42509

## UB7L-B Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

### Specification

<b>Nominal Voltage</b>	12 Volts
<b>Nominal Capacity (10H-R)</b>	8 Ah
<b>Approximate Weight (With Acid)</b>	5.95 lbs. (2.7 kgs)
<b>Recommended Maximum Charging Current Limit</b>	2.4A
<b>Equalization and Cycle Service</b>	14.8 VDC/unit Average at 25°C
<b>Cycle Life (JIS D 5302:2004)</b>	300
<b>Terminal Type</b>	F



### Physical Dimensions: in (mm)

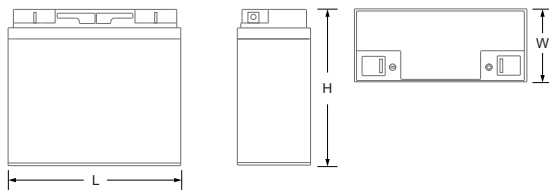

**L: 5.35" (136mm) H: 5.20" (132mm) W: 2.99" (76mm)**  
All data subject to change without notice.

### Terminal Configuration



### Polarity



### Exhaust



Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 2 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer<sup>®</sup> Maintainer 2000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@upgi.com](mailto:sales@upgi.com)

VR110509