



WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Save these instructions.
- Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
- Do not use equipment other than it's intended use.

CAUTION

- Do not use outdoors.
- Do not mount near gas or electric heaters.
- The use of accessory equipment that is not recommended by the manufacturer may cause unsafe conditions.
- Use flexible conduit only.

Installation Instructions

J-Box Mounting

- Feed the fixture leads through the back plate and connect the AC power supply (Fig A).
- Connect the wires through the J-Box. Mount the back plate on the J-Box and secure with screws.
- Connect the battery only after continuous AC power can be provided to the unit (Fig B).
- Align snaps and push the housing directly onto main bottom case (Fig C). Apply continuous AC power and press "TEST" button to check the battery.
- **NOTE:** Unused wire must be capped with enclosed wire nuts.




Fig.A

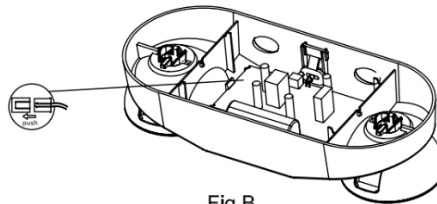


Fig.B




Fig.C

Surface Mounting

- Secure the back plate to the wall surface. Route the wires through the hole in the conduit flange and make the conduit connection.
- Connect the battery only after continuous AC power has been provided to the unit (Fig B).
- Align the snaps and push the housing directly onto the back plate (Fig C). Apply continuous AC power and press "TEST" button to check the battery.
- **NOTE:** Unused wire must be capped with enclosed wire nuts.

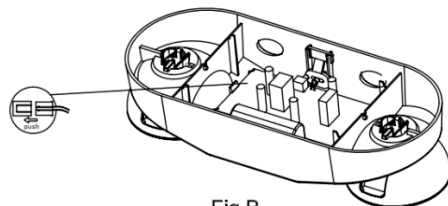


Fig.B




Fig.C




EMERGENCY LIGHT FIXTURE W/ LED LAMP HEADS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Battery


The battery in the unit may not be fully charged after electricity is connected to the unit. Let the battery charge for at least 24 hours before normal operation of this unit can take effect. To check, press the push-to-test switch. An internal light should illuminate.

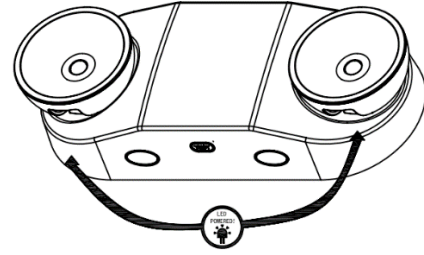

Operation

1. During an electrical power failure, the fixture will automatically illuminate for a minimum of 90 minutes.
2. To test, press the "TEST" switch and the emergency fixture will illuminate. When the switch is released, the fixture will switch off.

Wiring Diagram

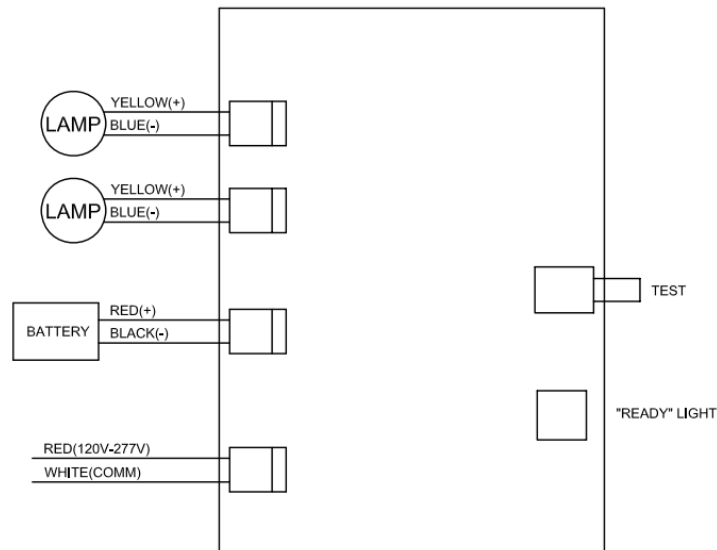

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.



EMERGENCY LIGHT FIXTURE W/ LED LAMP HEADS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.