

**WARNING**

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- To reduce the risk of fire and overheating, make sure all connections are tight.
- Once final building cleanup has been completed, remove protective film on lens.

**CAUTION**


- Do not install in wet locations. For dry and damp use only.
- Do not cover the fixture with heat insulation gaskets or similar materials.
- 

<p><b>Power Feed</b></p> <p>The diagram shows a top-down view of the junction box (1) with electrical wiring (2) and wire nuts (3) inside. A crossbar (4) is attached to the bottom of the box with screws (5). A power cord (6) is connected to the bottom of the box. The cord passes through a canopy kit (7) which includes a cable holder (8), a strain relief thread nut (9), and an aircraft cable (10).</p>	<p><b>Non Power Suspension</b></p> <p>The diagram shows a cross-section of the fixture being installed into a drywall ceiling (11). A butterfly drywall anchor (12) is inserted into the ceiling. A crimp stud (13) is attached to the anchor. A 2-inch canopy (14) is placed over the crimp stud. The canopy is secured to the ceiling by an anchor (16) and a screw (17). The fixture is then attached to the canopy using a cable holder (8) and a strain relief thread nut (9). The aircraft cable (10) is also shown.</p>
<p><b>Parts List</b></p> <ol style="list-style-type: none"> <li>1. 4" Octagonal Junction Box (by others)</li> <li>2. Electrical Wiring (by others)</li> <li>3. Wire Nut</li> <li>4. Junction Box Crossbar</li> <li>5. Screw PM4*22</li> <li>6. Power Cord</li> <li>7. 4" Power Canopy Kit</li> <li>8. Cable Holder</li> <li>9. Strain Relief Thread Nut</li> <li>10. Aircraft Cable</li> <li>11. Drywall Ceiling (by others)</li> <li>12. Butterfly Drywall anchor</li> <li>13. Crimp Stud</li> <li>14. 2" Canopy</li> <li>15. Solid Ceiling (by others)</li> <li>16. Anchor</li> <li>17. Screw PA4*30</li> </ol>	<p>A grid of 17 numbered images corresponding to the parts list:</p> <ul style="list-style-type: none"> <li>3. Wire Nut</li> <li>4. Junction Box Crossbar</li> <li>5. Screw PM4*22</li> <li>6. Power Cord</li> <li>7. 4" Canopy Power Feed</li> <li>8. Cable Holder</li> <li>9. Strain Relief Thread Nut</li> <li>10. Aircraft Cable</li> <li>12. Butterfly Drywall Anchor</li> <li>13. Crimp Stud</li> <li>14. 2" Canopy</li> <li>16. Anchor</li> <li>17. Screw PA4*30</li> </ul>


### Pendant Installation Instructions

- 1-1. Screw aircraft cables clockwise on the top luminaire.
- 1-2. Connect the quick connectors.
- 1-3. Zip tie power cord & aircraft suspension cable with the cable tie if needed.

The height of the luminaire can be adjusted with the aircraft cable gripper. Raise the luminaire by pulling the cables through the gripper. Lower the luminaire by pressing the top cylinder on the gripper, and carefully pull the luminaire down.

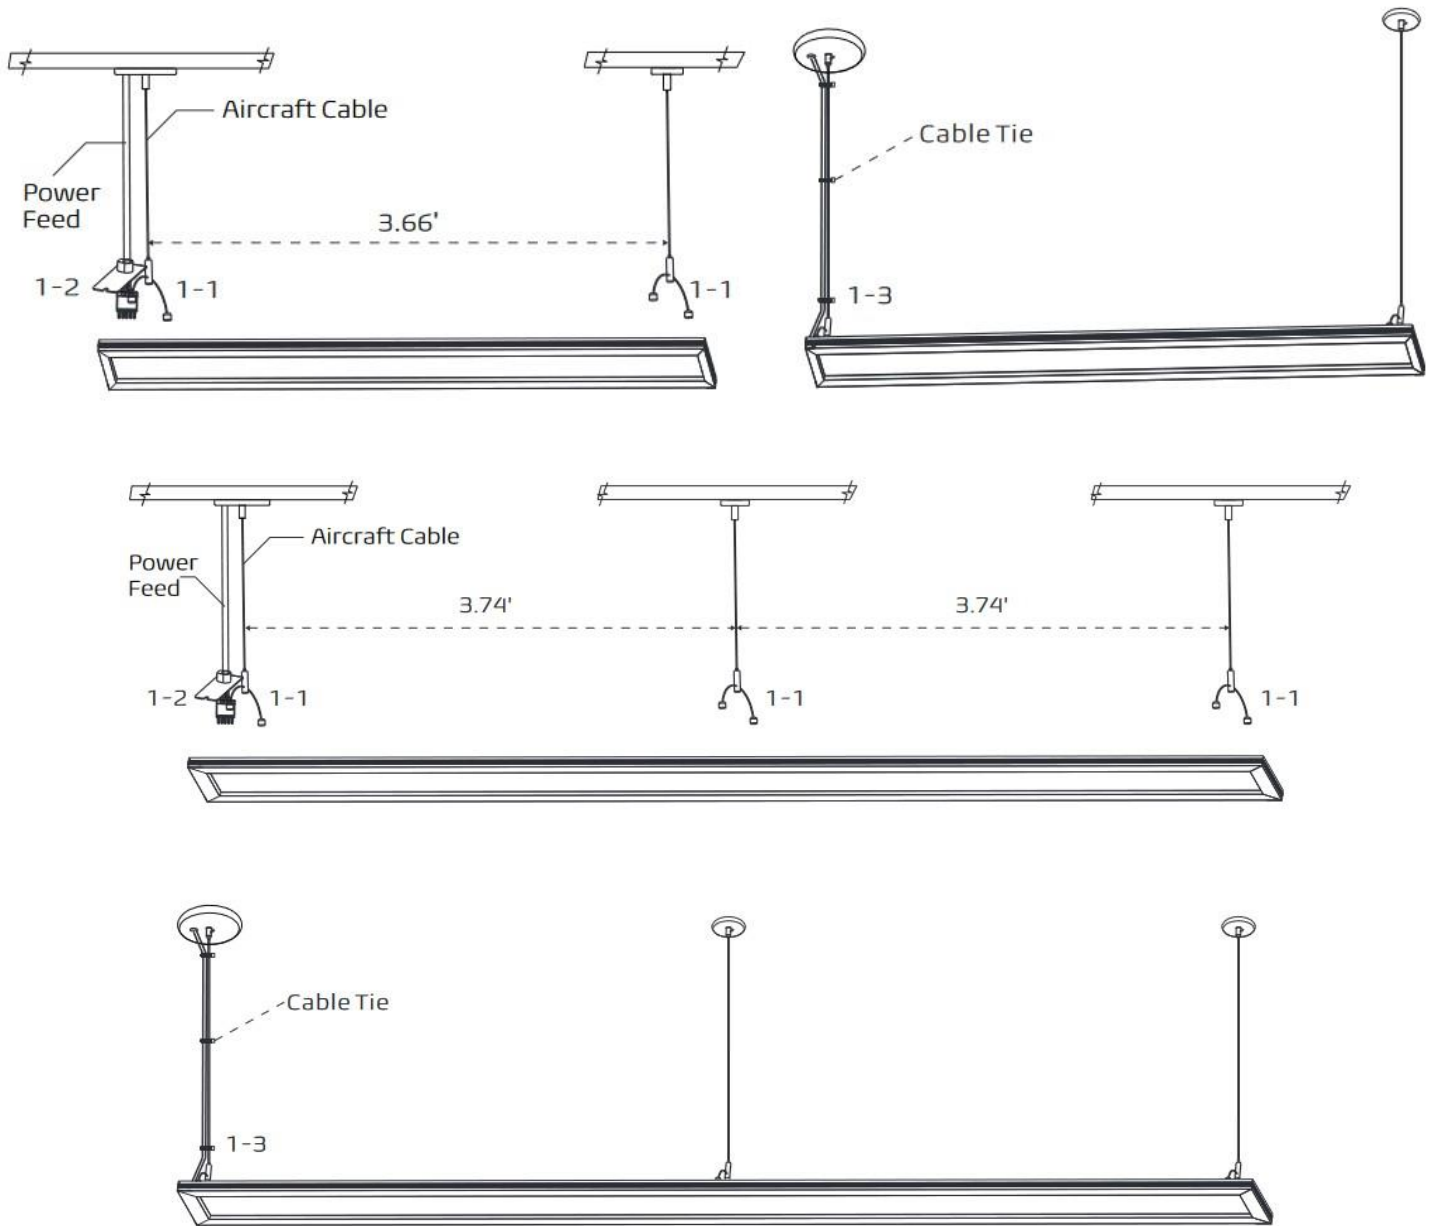

## Wiring Diagrams

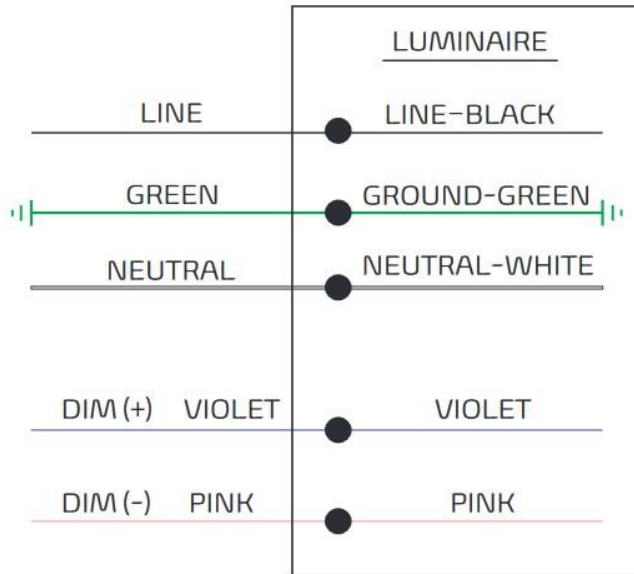

### **⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

### **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.

- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.