



2 FT. COLOR SELECTABLE LED STRIP FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Read the installation instructions carefully before installation.
- Notify the manufacturer if the fixture was damaged in transit.

CAUTION

- This luminaire must be installed in accordance with the National Electrical Code and applicable local codes and ordinances.
- Do not use an electric generator to test this fixture.
- In the event of smoke or fire, turn off the power immediately and call a licensed electrician.
- Use a strain relief bushing between the fixture and outlet box when connecting power wires.

Installation Instructions

Surface Mounting:

- Step 1. Drill holes in the corresponding positions and hammer the rubber plugs into the holes. (Figure 1)
- Step 2. Clamp the cover plate to the fixture. (This step can be omitted if the fixture can completely cover the junction box.) (Figure 2)
- Step 3. Press the buttons on both sides of the fixture to expose the driver. (Figure 3)
- Step 4. Thread wire into the fixture and install the fixture with the supplied screws. (Figure 4)
- Step 5. Connect the wires, and attach the fixture body back to the chassis. (Figure 5)

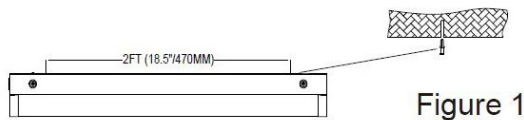


Figure 1




Figure 3

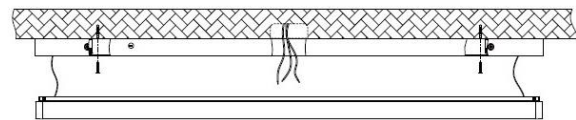


Figure 4




Figure 2

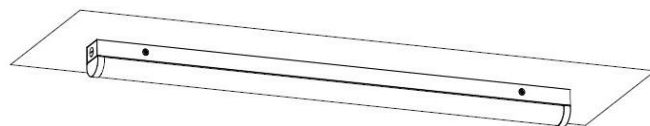


Figure 5

Wiring Diagram & Instruction

This LED fixture can be dimmed using a 0-10v dimmer. Connect the driver's PURPLE (D+) wire to the dimmer's PURPLE (+) wire and the driver's PINK (D-) wire to the dimmer PINK (-) wire using UL listed wire nuts.



2 FT. COLOR SELECTABLE LED STRIP FIXTURE


WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Wiring Instruction

L: Black; N: White; Green/Yellow; DIM + Purple; DIM – Pink; Aux White/Black

CCT Tunable

- Step 1. Press the buttons on both sides of the fixture to remove the lens, exposing the driver.
- Step 2. Adjust the CCT switch to the desired setting.



2FT

Compatible Dimmers

This LED fixture has 0-10V dimming. The below dimmers are recommended:

Brand	Model
LUTRON	NTSTV-DV
LEVITON	DS710-10Z
LEVITON	IP710
LEGRAND	RH4FBL3PW
LUTRON	NFTV-WH
LUTRON	DVSTV-WH

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.



2 FT. COLOR SELECTABLE LED STRIP FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.