



# 8" COLOR SELECTABLE NEW CONSTRUCTION LED DOWNLIGHT

## WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

### WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.

### NOTICE

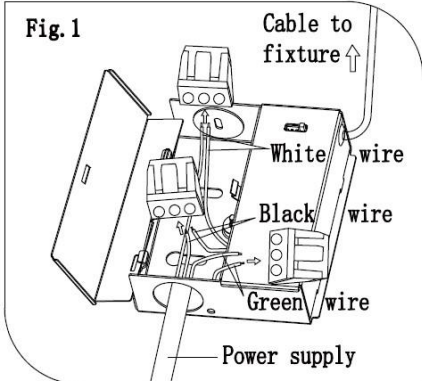
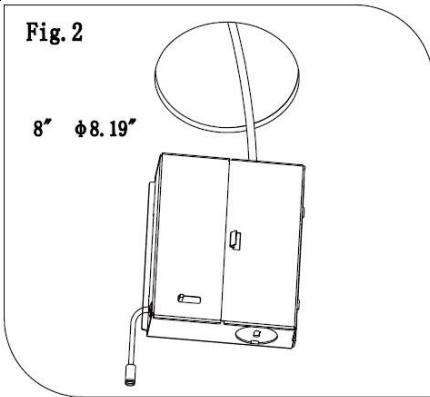
- Indoor installation only.

## Installation Instructions

### Pre-Installation

1. Turn power OFF at the electrical panel before starting installation.
2. Toggle the switch on the driver box to choose the CCT (2700K/3000K/3500K/4000K/5000K) you want.
3. Locate a suitable position to place the fixture and create an opening in accordance with the cut-hole dimensions, as shown in Fig. 2 (8.19")
4. Run electrical wire from the switch (power supply) through the mounting hole – use NMD90 Romex or BV cable.

### Driver Wiring

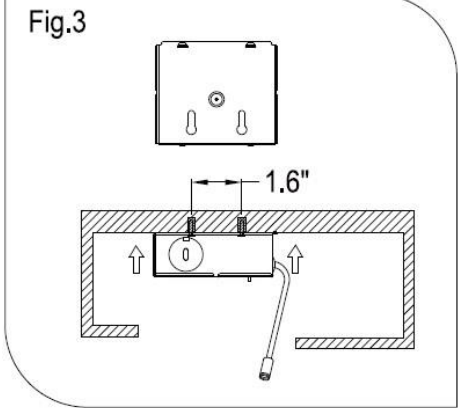
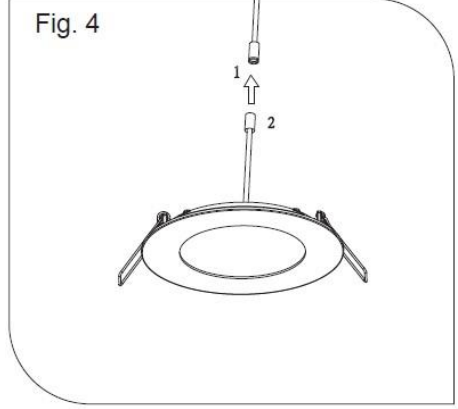
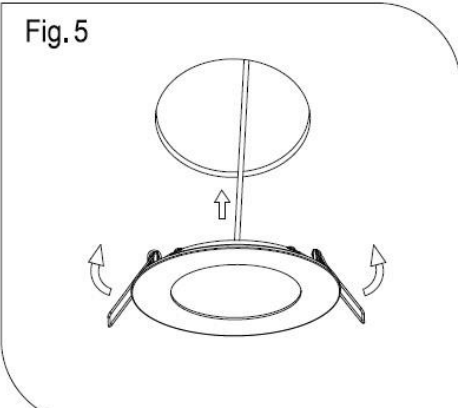
<ol style="list-style-type: none"> <li>1. Open the hardwire box cover and remove the appropriate knockout(s).</li> <li>2. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).</li> <li>3. Using connection terminal, connect the green ground wire to green, white to white, and black to black. (Fig. 1)</li> </ol>	 <p>Fig. 1</p>
<ol style="list-style-type: none"> <li>4. Place all wiring and connectors back into the box and close the cover.</li> <li>5. Insert hardwire box through the mounting hole. (Fig. 2)</li> </ol> <p><b>New Construction Applications:</b> Hardwire box must be firmly secured to studs, joists, or similar fixed structural units.</p> <p><b>Remodel Applications:</b> Hardwire box must be firmly secured to studs, joists, or similar fixed structural units.</p>	 <p>Fig. 2</p> <p>8" φ 8.19"</p>



# 8" COLOR SELECTABLE NEW CONSTRUCTION LED DOWNLIGHT

## WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

### Fixture Installation

<p>1. Make two holes in the wall, spaced 1.6" apart. Fix the hardwire box in place with provided screws. (Fig. 3)</p>	<p>Fig.3</p> 
<p>2. Connect the fixture to the hardwire box by inserting and twisting the male/female connectors. (Fig. 4)</p>	<p>Fig. 4</p> 
<p>3. Push the spring-loaded clips on the fixture upwards and insert the fixture base into the mounting hole. Release the clips and the fixture will be pulled flush into the ceiling. (Fig. 5)</p> <p>4. Once assembly is complete, turn ON power to confirm the fixture is working properly.</p>	<p>Fig.5</p> 

### **⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.



## 8" COLOR SELECTABLE NEW CONSTRUCTION LED DOWNLIGHT WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

### **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.