



**WARNING**

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Please abide by related country, regional and local law and regulations when installing this fixture

**CAUTION**


- Do not use an electric generator to test this fixture.
- If wires smoke or spark, turn off the fixture immediately and consult a qualified electrician.
- Use listed waterproof strain relief bushing when connecting the supply cord to the outlet box.

**Installation Instructions**

Installation Methods: Chain Mount, Surface Mount, 1/2" NPT Mount. (Please choose the most suitable installation method for the purchased product as per your needs.)

**Chain Mount: (Ring or Hook)**

- Step 1. Screw the ring or hook into the fixture and tighten it securely (Figure 1).
- Step 2. Hang the fixture on the ceiling hook or chain (Figure 2).
- Step 3. Connect the wires of the fixture to the mains according to local electrical codes and regulations, ensure the connection is stable and well protected.
- Step 4. Install the safety cable (Optional)
  - a. Fix the buckle of the safety cable to an appropriate ceiling structure (Figure 3).

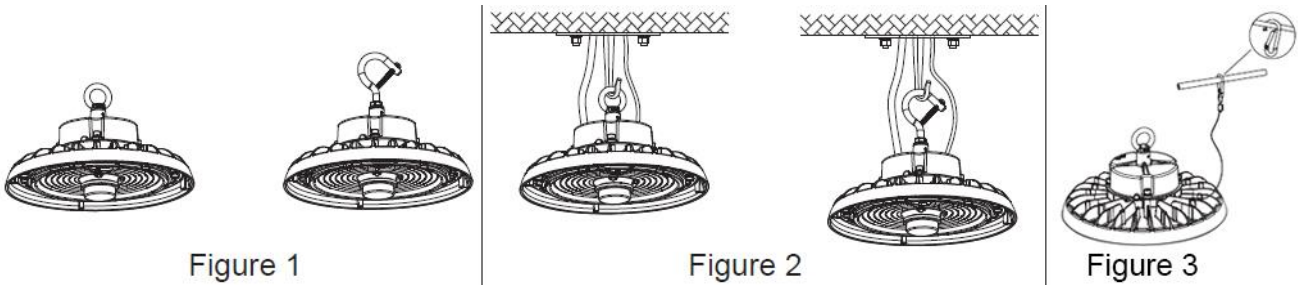

**Field-Adjustable Wattage & CCT**

The color temperature and lumen output can be adjusted by the two DIP switches located on the driver. Each DIP switch has 3 options (left, middle and right), allowing 3500K (Natural White), 4000K (Cool White), 5000K (Daylight) and 3 wattages (low, medium or high).

**Factory Default Settings:**


Model	Default Settings
100W/80W/60W Selectable	100W, 5000K
150W/120W/100W Selectable	150W, 5000K
240W/200W/150W Selectable	240W, 5000K



# COLOR/WATTAGE SELECTABLE UFO LED HIGH BAY FIXTURE


## WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

1. DIP switches are under the plug on the driver box (Figure 4).
2. Remove the plug on the driver box.
3. Select a wattage and color temperature by sliding each switch to the desired value.
4. Reinsert the plug back on the driver box.

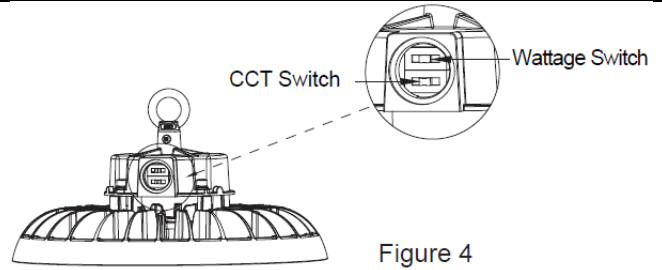

### Wiring Instructions

- L: Black
- N: White
- ⊕: Green/Yellow
- DIM +: Purple
- DIM -: Pink

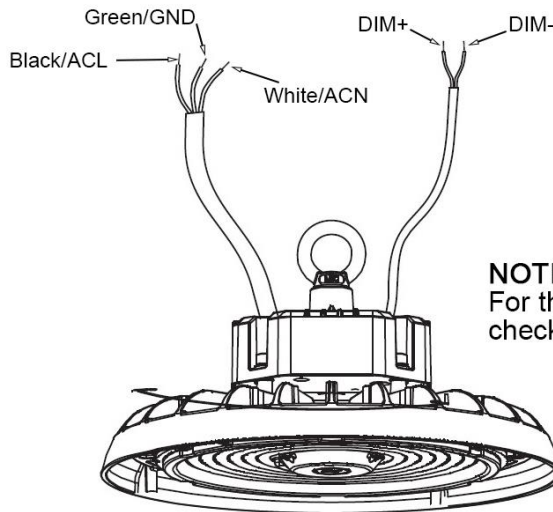

**NOTE:**  
For the wire color of DIM+ & DIM-, check the fixture wire label.

Please choose the appropriate dimming way according to your needs. You can also choose not to use this function.

*\*The product cannot be connected to a dimming device when it's equipped with Motion Sensor.*

### Compatible Dimmers

This fixture has 0-10V dimming. See list of recommended dimmers below:

Brand	Model
LUTRON	NTSTV-DV
LEVITRON	DS710-10Z / IP710
LEGRAND	RH4FBL3PW



## **⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

## **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.