



COLOR/WATTAGE SELECTABLE LED FLOOD LIGHT FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.

CAUTION

- Do not use an electric generator to test this LED fixture.
- In the event of smoke or fire, turn off power immediately and contact a licensed electrician.


NOTICE

- Suitable for outdoor installation.

Installation Instructions – Attaching the Mounts

Optional Mounts

There are 3 optional mounts for this fixture:

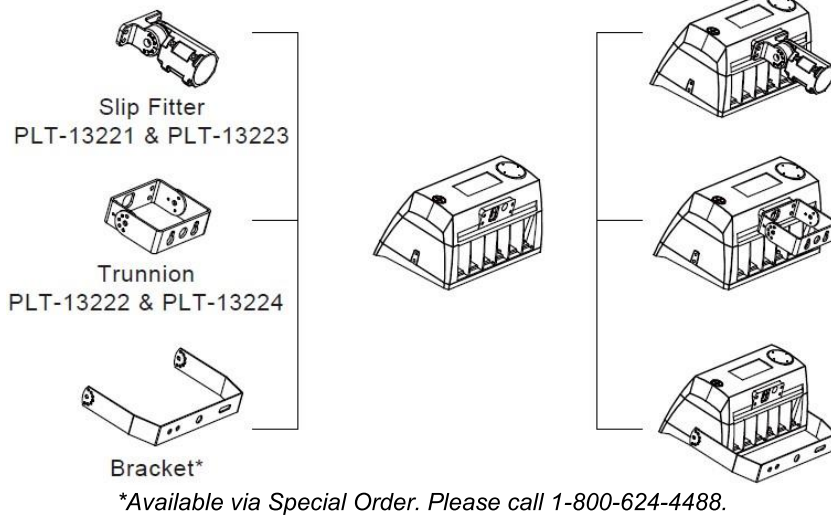

Adjustable Slip Fitter Mount

- Step 1. Remove the mount's mounting screws on the fixture and run the wires through the mount (Figure 1).
- Step 2. Install the mount on the fixture (Figure 2).




Figure 1

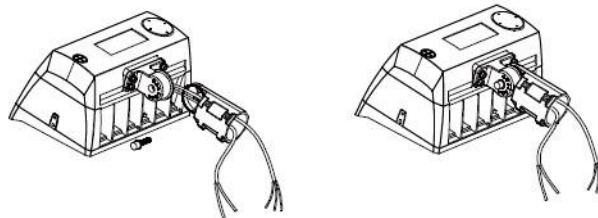


Figure 2



COLOR/WATTAGE SELECTABLE LED FLOOD LIGHT FIXTURE
WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Trunnion Mount

- Step 1. Run the fixture wires through the hole on the upper part of the mount (Figure 3).
- Step 2. Attach the mount (Figure 4).




Figure 3




Figure 4

Bracket*

- Step 1. Install the two big screws (Figure 5).
- Step 2. Install the two small screws (Figure 6).




Figure 5




Figure 6

**Available via Special Order. Please call 1-800-624-4488.*

Installation Instructions – Installing the Fixtures

LED Flood Light w/ Slip Fitter Mount

- Step 1. Connect the wires correctly and run the wire into the pole. Fasten the locking bolts between the slip fitter and the pole (Figure 7).
- Step 2. Loosen the adjustment bolts to align the fixture to the desired angle, then tighten the bolts once fixture is positioned (Figure 8).

NOTE: Adjustable angle is 0~+/-90° (Figure 7)

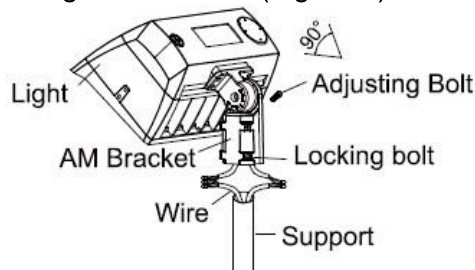


Figure 7

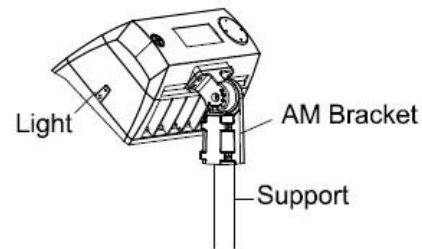


Figure 8



COLOR/WATTAGE SELECTABLE LED FLOOD LIGHT FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

LED Flood Light w/ Trunnion Mount

- Step 1. Drill holes on the wall as shown in the drill pattern (Figure 9).
- Step 2. Tap the expansion bolts into the wall using a hammer (Figure 10).
- Step 3. Connect the fixture to the bracket and tighten the screws, then make proper wire connections and put them into the junction box (Figure 11).

NOTE: Adjustable angle is 0~+/-90° (Figure 11)




Figure 9




Figure 10


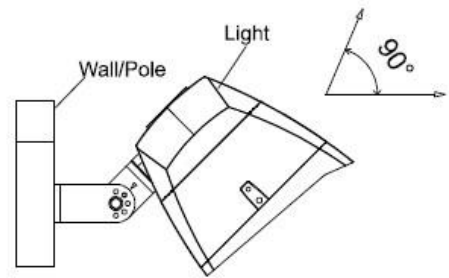


Figure 11

Wiring Diagram

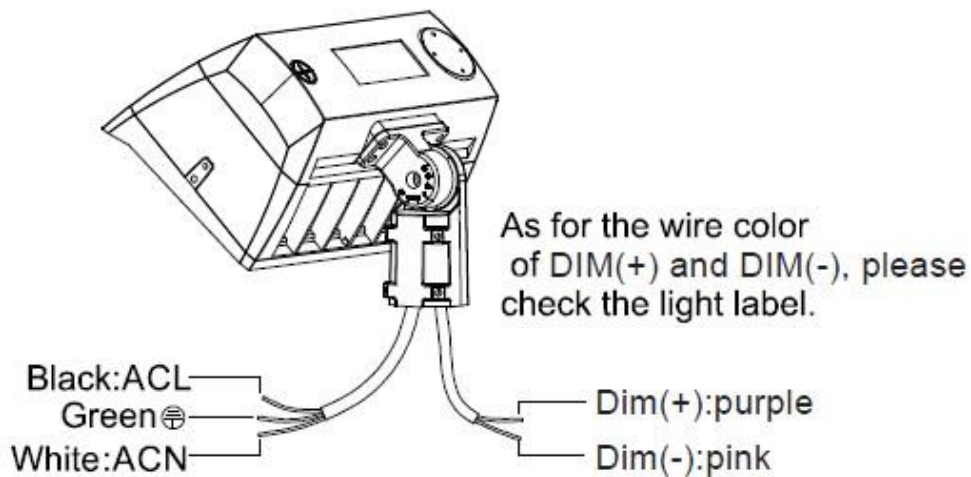

Compatible Dimmers

This fixture has 0-10V dimming. See the list of recommended dimmers below:

Brand	Model
LUTRON	NTSTV-DV
LEVITON	DS710-10Z / IP710
LEGRAND	RH4FBL3PW



Field-Adjustable Wattage and CCT

The color temperature and lumen output can be adjusted using the two DIP switches inside the plug. Each DIP switch has three options (left, middle, right), corresponding to three CCTs and 3 wattages respectively, that can perfume the desired CCT and lumen output combination.

NOTE: Please turn off the power before adjusting the wattage and color temperature.

1. The DIP switches are located inside the plug on the back of the fixture (Figure 12).
2. Using a screwdriver, turn the plug counterclockwise to open it.
3. Select the wattage and color temperature by sliding the switches left or right respectively to the desired value (Figure 13).
4. Replace the plug and turn it clockwise to close it.

Factory Default Settings:

- PLT-13221 – 200W, 5000K
- PLT-13222 – 200W, 5000K
- PLT-13223 – 300W, 5000K
- PLT-13224 – 300W, 5000K




Figure 12

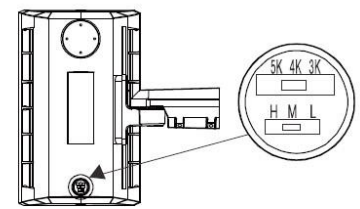


Figure 13

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.



⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.