



# COLOR/WATTAGE SELECTABLE LED BED LIGHT FIXTURE

## WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

### WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Read instructions carefully before installation.

### NOTICE

- Do not install the luminaire in a location where it will be exposed to harmful chemicals such as sulphur, acid, or halogen.

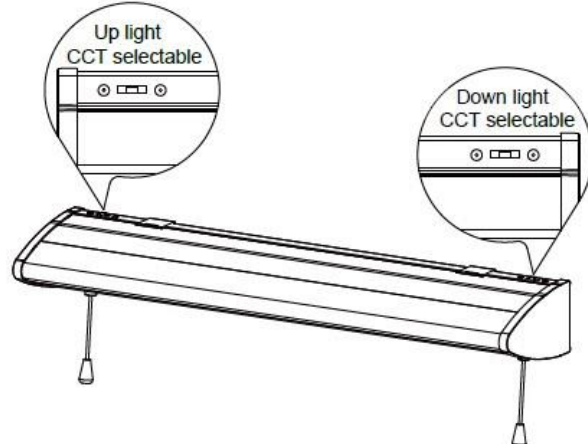
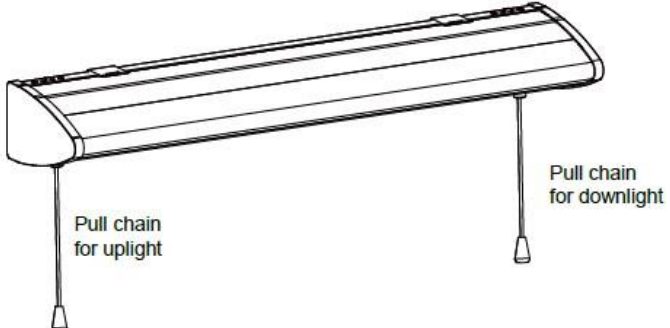
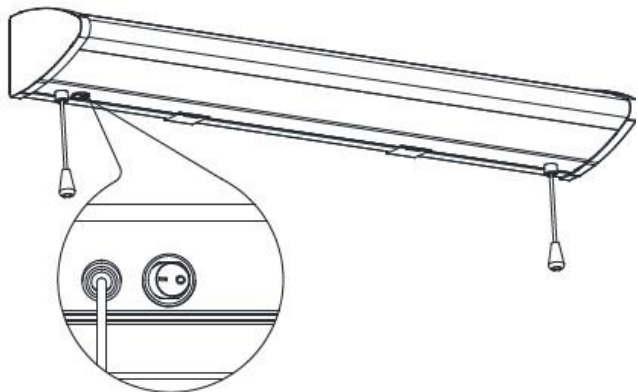
### Installation Instructions

|   |  |
|---|--|
| <p>Step 1. Open the carton, take out the brackets and affix them on the wall with anchors and self-tapping screws (provided).</p>   |  |
| <p>Step 2. Take out the fixture and unscrew the two screws on the back plate, then take out the terminal block from the housing.</p>  |  |
| <p>Step 3. Make sure to turn off mains power before beginning wiring. Take out the AC wires from the wall junction box (not provided) and plug them into the terminal block.</p> <ul style="list-style-type: none"><li>- Black = Line</li><li>- White = Neutral</li><li>- Yellow/Green = Ground</li></ul> <p>After wiring is complete, screw the back plate onto the fixture, then push the fixture into the wall brackets till it's firmly attached.</p> |  |



## COLOR/WATTAGE SELECTABLE LED BED LIGHT FIXTURE

### WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

|  |   |
|--|---|
| <p>Step 4. The CCT DIP switches are located on top of the fixture. Select your required CCT for the uplight and downlight.</p> <p>CCT Options: 3500K, 4000K, 5000K</p>   |  <p>The diagram shows a side view of the LED bed light fixture. Two circular callouts point to the top of the fixture. The left callout is labeled 'Up light CCT selectable' and points to a set of three DIP switches. The right callout is labeled 'Down light CCT selectable' and points to another set of three DIP switches.</p> |
| <p>Step 5. Turn on the power to verify your successful installation. The pull chain on the left side turns the uplight on and off. The pull chain on the right side turns the downlight on and off, and cycles through wattage selections.</p> <p>The cycle for the pull chain is:</p> <ul style="list-style-type: none"><li>- PLT-90469 -- 20W (ON), 15W, 10W, OFF</li><li>- PLT-90470, PLT-90471 – 30W (ON), 20W, 10W, OFF</li></ul> |  <p>The diagram shows a side view of the LED bed light fixture. Two pull chains are shown hanging from the bottom. The left pull chain is labeled 'Pull chain for uplight' and the right pull chain is labeled 'Pull chain for downlight'.</p>   |
| <p>Step 6. In case the pull chain doesn't work, press the I/O button to turn the uplight and downlight on and off simultaneously.</p>  |  <p>The diagram shows a side view of the LED bed light fixture. A circular callout points to the bottom of the fixture, showing a button labeled 'I/O' and a small indicator light.</p>   |

## ⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.



## COLOR/WATTAGE SELECTABLE LED BED LIGHT FIXTURE

### WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

### **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.