

WARNING:

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS

ADDED WEIGHT OF THE DEVICE MAY CAUSE INSTABILITY OF A FREE-STANDING PORTABLE LUMINAIRE
USE ONLY WITH A PORTABLE TABLE LUMINAIRE THAT IS PROVIDED WITH A SHADE

AVERTISSEMENT:

LE DISPOSITIF CONSTITUE UN POIDS SUPPLÉMENTAIRE CE QUI PEUT CAUSER L'INSTABILITÉ D'UN LUMINAIRE PORTATIF AUTONOME
UTILISER UNIQUEMENT AVEC UNE LAMPE DE TABLE DOTÉE D'UN ABAT-JOUR
USAR EN LÁMPARAS DE MESA PORTÁTILES EN DONDE LA DISTANCIA DESDE LA PARTE INFERIOR DE LA BASE A LA PARTE SUPERIOR DEL PORTALÁMPARAS NO DEBE EXCEDER TRES VECES EL DIÁMETRO MÍNIMO DE LA BASE



Do not use this LED lamp with an electric generator. Please avoid using the led lamp in environment where there is smoke, sulfur, and corrosive substances. But if it's used in such environment, make sure the led lamp is well protected by an enclosed lampshade with dimension no less than below size, and materials made up of glass, semi-glass, or semi-metallic. There should be no covering (such as insulation) on the surface of the lampshade to block heat dissipation.

Maximum Power (W)	50 & 80	120	150	200	270	360	450
Volume (Inches)	16.6*8.7*8.7	17.4*10.3*10.3	18.5*12.6*12.6	18.5*12.6*12.6	18.5*15.0*15.0	18.5*15.0*15.0	18.5*15.0*15.0

Product features:

- ◆ 50-450W CCT adjustable mode are designed with 3000K /4000K/ 5000K CCT adjustable function.
- ◆ Two dimming options are available for the 50-450W, continuous dimming or wattage selection.
- ◆ Can be with clear or frosted PC cover.
- ◆ Designed with AC277-480V internal driver.
- ◆ Long lifespan and good heat dissipation. 50-450W with fan.
- ◆ Direct replacement for Metal Halide, easy installation.
- ◆ Fits many different fixtures to replace traditional lamps.




Application:

Widely used in supermarket, warehouse, garage, home, office, hotel, hospital, school, street, garden etc.


Installation Instructions:

Warning: Please make sure the power is off before installation.


1. Turn off the power switch.
2. Unscrew the existing CFL, metal halide, or high pressure sodium bulb. See Figure 5.
3. Screw in the LED Corn Lamp after removing or disconnecting any ballast, capacitor or ignitor that may be present. See Figures 1, 2, and 3.
4. If a security rope is provided, please attach one end to the LED Corn Lamp as shown in Figure 3 and the other end to a nearby structural support.
5. LED Corn Lamp CCT and wattage can be adjusted. See Figure 4.
6. Turn on the power switch. (Finished!)




Figure(1)




Figure(2)

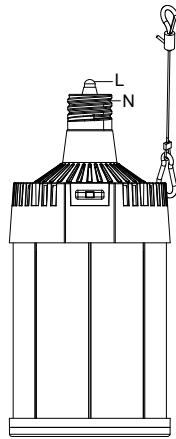

Figure(3)





CCT and wattage adjustable mode diagram:

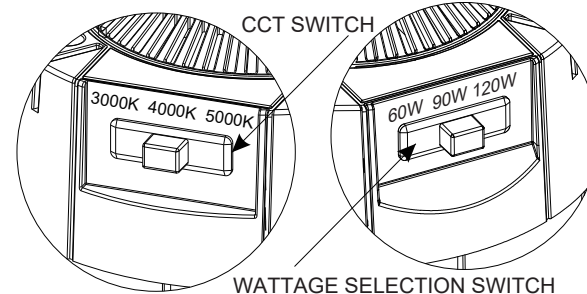

Figure(4)

Maximum Rated Wattage	Wattage Selections
50W	25W 38W 50W
80W	40W 60W 80W
120W	60W 90W 120W
150W	80W 120W 150W
200W	100W 150W 200W
270W	135W 200W 270W
360W	180W 270W 360W
450W	225W 338W 450W

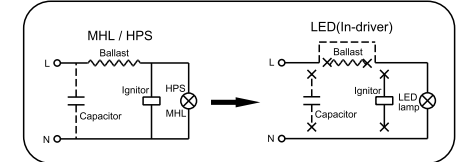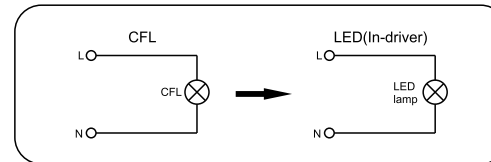

Figure(5)