



COLOR/WATTAGE SELECTABLE ROTATABLE LINEAR LED HIGH BAY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Please abide by related country, regional and local law and regulations when installing this fixture.

CAUTION

- Do not use an electric generator to test this fixture.
- Please use listed strain relief bushing when connecting the supply cord to the outlet box.
- If wires smoke or spark, turn off fixture immediately and custom a qualified electrician.

Installation Instructions

Installation methods available: Chain/Cable Mount, 3/4" NPT Mount, Surface Mount. (Please choose the most suitable installation method for the purchased product as per your needs.)

Chain/Cable Mount Installation

- Step 1. Hook up the chain. (Figure 1)
- Step 2. Connect the chain with the fixture. (Figure 1)
- Step 3. Fix the chain to an appropriate ceiling structure, adjust the chain length as per your need. (Figure 1)
- Step 4. Choose the suitable wiring knock out, connect the wires according to local standards and the National Electrical Code. Use only UL listed wiring.
- Step 5. The panels can be rotated, and the maximum angle of outward rotation is 135-degrees. (Figure 2)

NOTE: Purple and pink leads inside the driver compartment are 0-10V (low voltage) dimming leads. Connect to dimming low voltage wiring only if desired.

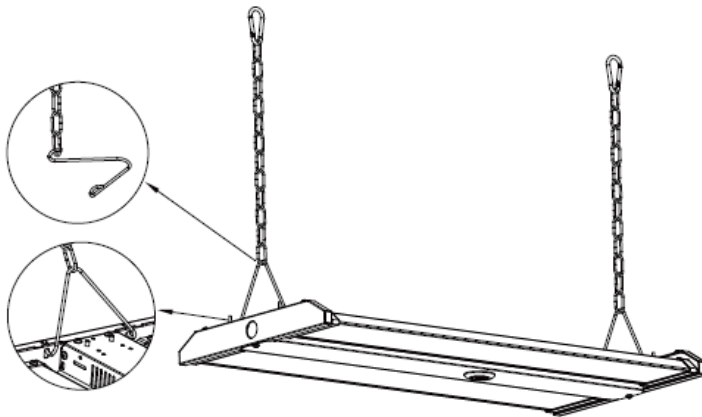


Figure 1

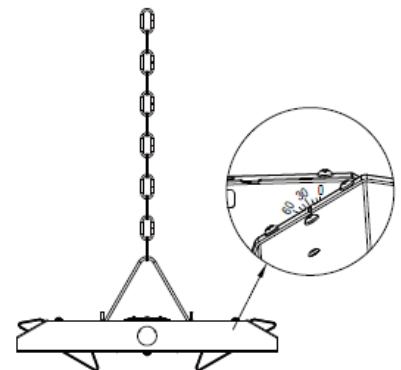


Figure 2



COLOR/WATTAGE SELECTABLE ROTATABLE LINEAR LED HIGH BAY FIXTURE


WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Field-Adjustable Wattage & CTT

The color temperature and lumen output can be adjusted by the two DIP switches located on the driver (Figure 3). The CCT switch has 2 options (left, middle and right), allowing 4000K (Cool White) and 5000K (Daylight) selectable. The wattage switch has 3 options (left, middle and right), allowing 3 wattages (low, medium or high) selectable.


Factory Default Settings:

Model	Default Settings
165/150/130W Selectable	165W, 5000K
220/200/180W Selectable	220W, 5000K
300/275/255W Selectable	300W, 5000K

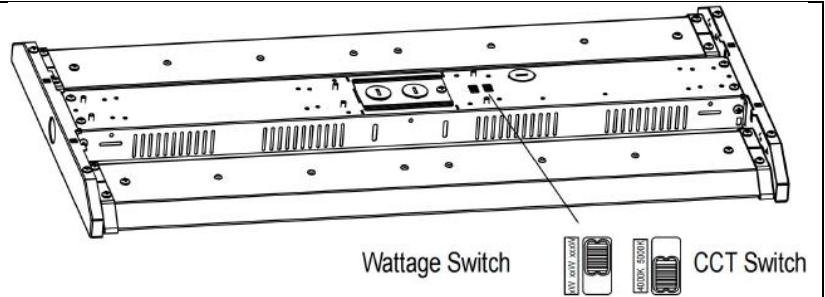

Wiring Instruction

L: Black
N: White
⓪: Green/Yellow
DIM +: Purple
DIM -: Pink
(As for the color of the DIM+ and DIM-, please check the light label.)

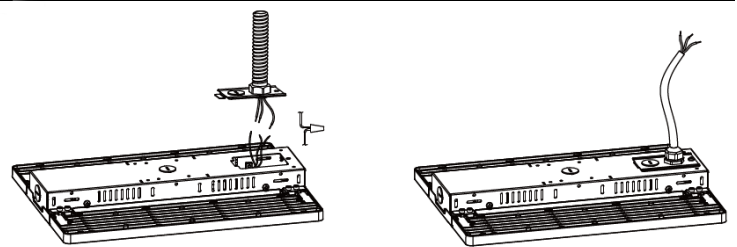

Please choose the appropriate dimming way according to your needs. You can also choose not to use this function.

**The product cannot be connected to a dimming device when it's equipped with Motion Sensor.*

Compatible Dimmers

This fixture has 0/1-10V dimming. See list of recommended dimmers below:

Brand	Model
LUTRON	NTSTV-DV
LEVITON	DS710-10Z / IP710
LEGRAND	RH4FBL3PW



COLOR/WATTAGE SELECTABLE ROTATABLE LINEAR LED HIGH BAY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.