


 Please read **all the instructions** before attempting installation

- Please read the product specification carefully first to confirm that the working environment is in line with the condition on the specification before it is used.
- Tools required for assembly (not included): Screwdriver, Phillips screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder, Wire Stripper, and Measuring Tape.
- Please confirm the input voltage and frequency before use.
- The light must be installed by professional personnel
- If the power cord and case of the products are damaged, it will be regarded as disqualified product and should not be used.
- If external soft cable or wire of the product is damaged, the wire should be replaced by manufacturer or service agent or personnel with similar qualification to avoid danger.
- This luminaire is designed to operate in ambient temperatures ranging from 32°F to 104°F and to be horizontally mounted facing down.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR
- CAUTION - RISK OF FIRE

Packaging Contents


A. LED Industrial Strips Series (LLSN)

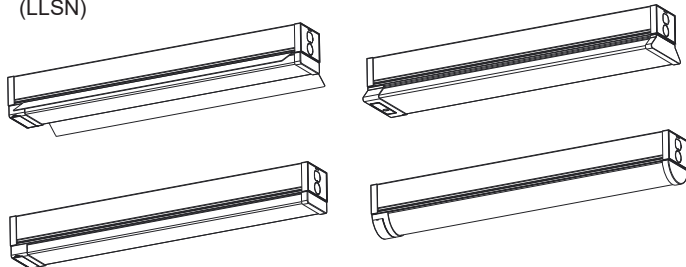

B. Wire connectors (X5)




C. Screws (X2) Wall Anchors (X2)




Installation Instructions

1. Turn off the power at the main fuse/breaker box. Carefully open carton, remove all the parts.
2. Pass the wires through the hole on the junction plate (sold separately). Affix the junction plate over the outlet box using screws.
3. Remove the lens by pulling from one side of the fixture.
4. Pass the wires through the hole on the back side of the fixture.
5. Affix the fixture's base to the ceiling using anchor screws and connect the wires: Black to Black, White to White, Green to Green, Pink to Pink, Purple to Purple, Yellow to Yellow*1.

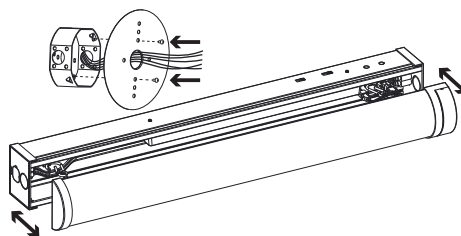


Standard Installation

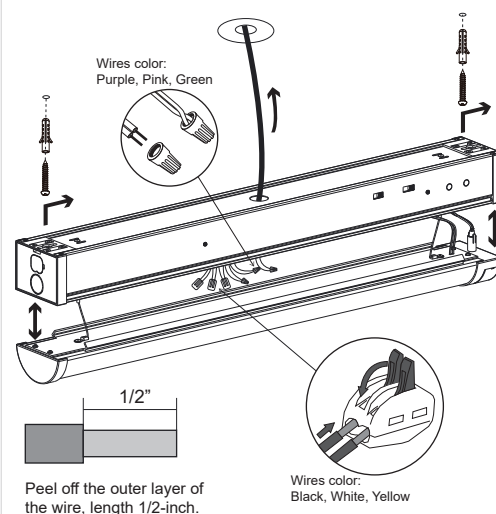

*1: When the product is installed with an emergency drive, the yellow wire must be connected to the wall switch.


6. Install two screws on the mounting surface spaced apart. Leave approximately 0.1" between the surface and screw.
7. Recommended screw head dimension is 7-8mm. (Recommend to use screws with wall anchors if mounting onto plaster board).
8. Align fixture to the screws and slide to one side to secure it in place. The fixture should be firmly fixed against the screws. If not firmly fixed, remove the fixture and tighten the screws to a smaller gap distance to the surface.
9. Close the lens.
10. *Optional Changeable Color Temperature (CCT): Turn the switch to the position of 3000K, 3500K, 4000K, 4500K to select the color temperature.
11. *Optional Wattage Selectable: Turn the switch to the position of 20W, 25W, 30W, 35W to select wattage with 2ft. Turn the switch to the position of 35W, 40W, 45W, 50W to select wattage with 4ft. Turn the switch to the position of 40W, 64W, 82W, 100W to select wattage with 8ft.

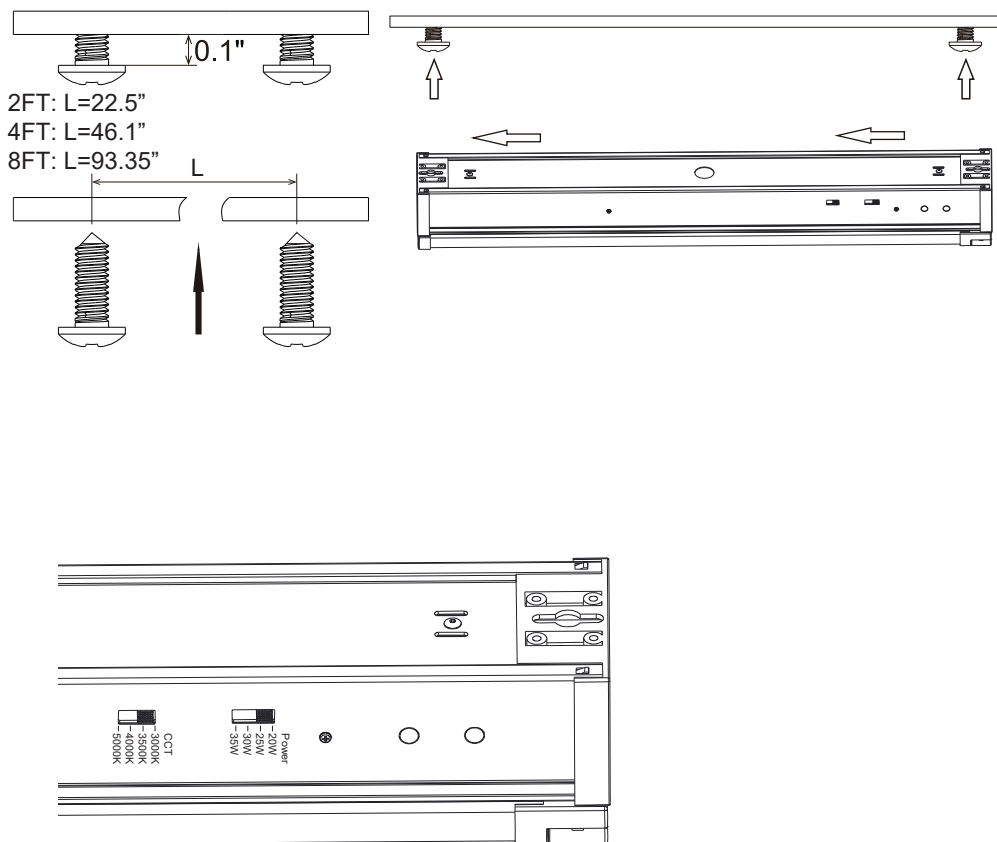



Installation Instructions

CHAIN MOUNTING

1. **Mounting to drywall.**
Drill a 1/4 in. hole in the ceiling to clear the closed flaps of the toggle bolt. Make sure to fasten the toggle bolt into the butterfly nut before inserting the flaps into the ceiling. Tighten the toggle bolt.
3. **Attaching the light to the chain.**
Install one header of chain to the hook on the fixture body. Repeat this step on the other side of the fixture.




2. **Mounting to wood.**
Drill a 1/16 in. diameter pilot Hole in the ceiling. Make sure to fasten the combo wood-machine end into the metal hook. Tighten the hook screw into the wood.
4. **Attaching the chain to the ceiling.**
Install the pendant to the screw, tightened by hand. Hang the fixture body by placing one chain set over each hook that has been installed on the ceiling. Adjust chains to level light. The fixture must hang at least 3 in. from the ceiling.



- 5. Turn off the power and connect wires from fixture to power supply. Contain wires in metal or plastic wire hose.
- 6. Close the lens.


2FT: LC=20.5"
4FT: LC=44.1"
8FT: LC=91.35"

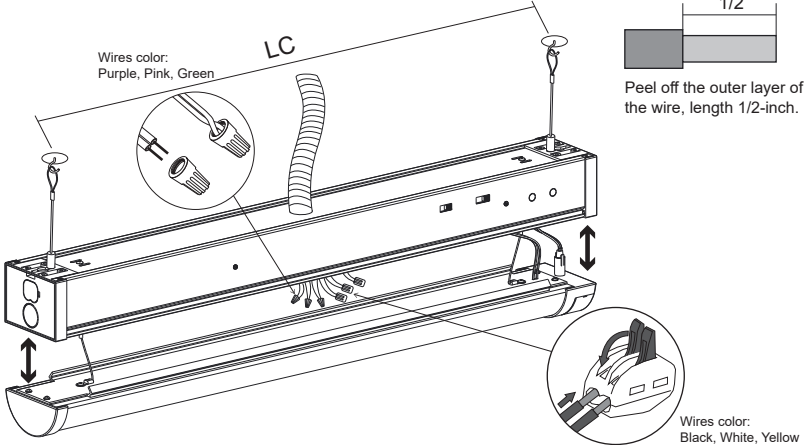

⚙️ Installation Instructions

CONNECTING MULTIPLE FIXTURES

- 1. Fixtures can be connected directly together using the Connector.
- 2. If need to affix one fixture to another, please use connection bracket and screws.

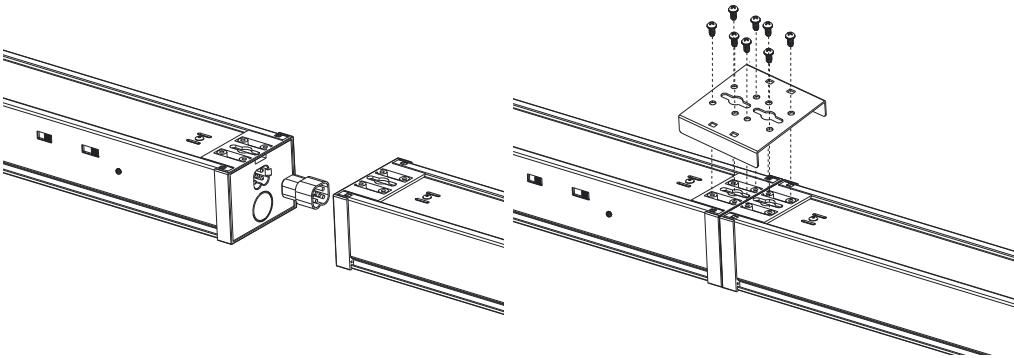

Model		20W	25W	30W	35W	40W	45W	50W	60W	80W	100W
Linkable Quantities	120V	16	14	12	10	9	8	6	5	4	3
Depending on Voltage	277V	38	35	30	23	23	19	17	12	10	9