



ADVENTURE POWER[®]

UPG No. 43033

This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

UTX20HL-BS




Dry Charge AGM Battery

Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	18 Ah
Approximate Weight (With Acid)	13 lbs. (5.9 kgs)
Recommended Maximum Charging Current Limit	5.4A
Equalization and Cycle Service	14.8 VDC/unit Average at 25°C
Cycle Life (JIS D 5302:2004)	
Terminal Type	D

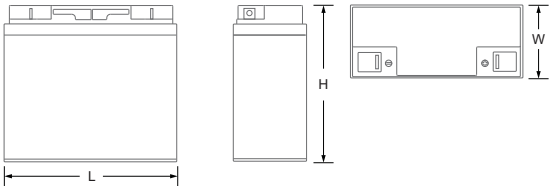

Physical Dimensions: in (mm)

	Terminal Configuration 	Polarity 
L: 6.89" (175mm) H: 6.14" (156mm) W: 3.39" (86mm) All data subject to change without notice.		



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 6 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer[®] Maintainer 4000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Energizer[®] and the related graphics are trademarks of Eveready Battery Company, Inc. and are used under license by UPG.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

VR110409