

90+ LIGHTING CHANDELIER C12 5W



40W
REPLACEMENT

5W
Watts

E12

120V
Voltage

DAMP
LOCATION

Dimmable

Good quality of light and color rendering (80+ CRI, 0+ R9),
Smooth dimming. Dimming lower than 20%.




ELECTRICAL SPECIFICATIONS



MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-RL6.CP05.1105	350LM	5W	2700K	110°	>80	>0.9	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-RL6.CP05.1105	1.4in X 3.9in	1.62oz	-20°C - 40°C	10pcs	100pcs

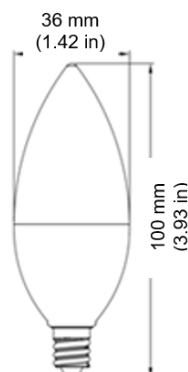

90+ LIGHTING CHANDELIER C12 5W

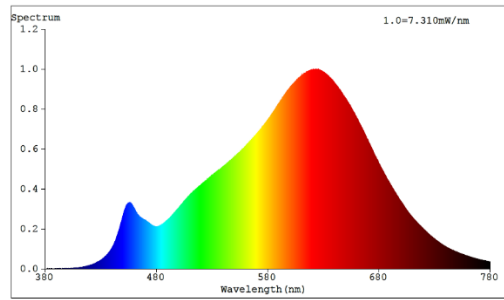


RA – CHART: >80

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

R1=81	R2=91	R3=96	R4=79	R5=81	R6=89	R7=82
R8=59	R9=10	R10=80	R11=78	R12=75	R13=83	R14=99

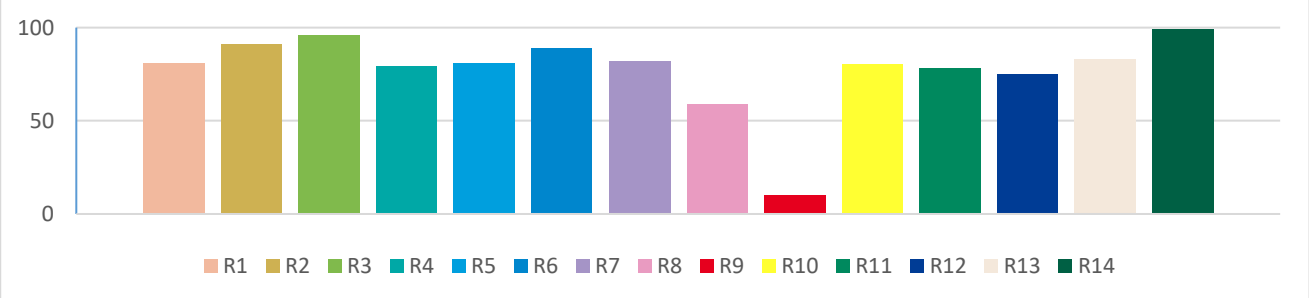

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

