


Specification

Nominal Voltage	12V
Nominal Capacity	Equivalent to a 14Ah SLA
Approximate Weight	1.68 lbs (.763 kg)
Cold Cranking Amps	210
Self Discharge	Less than 3% per month
Charge Method (Constant Voltage)	
Cycle Use (Repeating Use)	
Initial Current	14 A Max.
Control Voltage	14.4 V
Float Use	
Control Voltage	13.4 - 13.5 V



Physical Dimensions: in (mm)

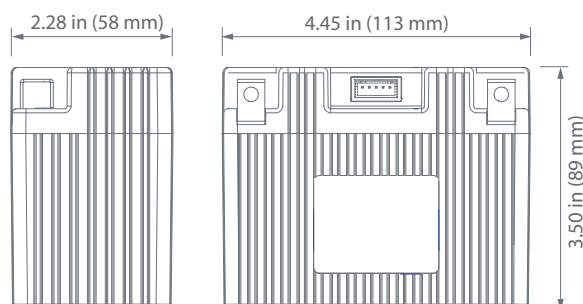

L: 4.45 in (113 mm)
W: 2.28 in (58 mm)
H: 3.5 in (89 mm)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Polarity



- Extreme-rate LiFePO4 cell technology
- Ultra light, One-fifth the weight of a lead-acid battery on average
- Zero sulfation for longer service life
- Drop-in replacement for your OEM battery
- Military spec carbon composite case
- Faster cranking for better starts
- Super-fast recharge rate
- No explosive gasses during charge - no lead, no acid
- Environmentally friendly - just discharge and recycle



With Shorai Technology



www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

Adventure Power® Phantom Batteries are only for use as starter batteries for internal combustion engines, in powersports applications only. Batteries must be selected for vehicles based on UPG recommendations per vehicle type, and no warranty will apply for any other uses. Adventure Power® is a registered trademark of UPG.

M1229-1