

Specification


Nominal Voltage	12V
Nominal Capacity	Equivalent to a 36Ah SLA
Approximate Weight	4.82 lbs (2.19 kg)
Cold Cranking Amps	540
Self Discharge	Less than 3% per month
Charge Method (Constant Voltage)	
Cycle Use (Repeating Use)	
Initial Current	24 A, Max.
Control Voltage	14.4 V
Float Use	
Control Voltage	13.4 - 13.5 V



Polarity




Physical Dimensions: in (mm)

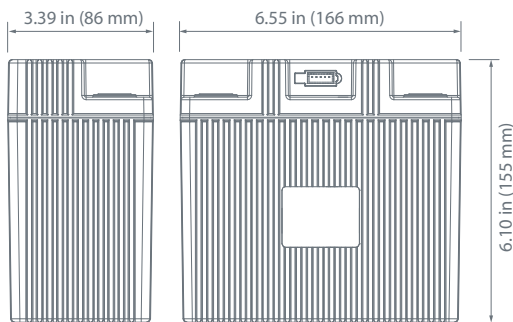


L: 6.55 in (166 mm) Tolerances are +/- 0.04 in. (+/- 1mm)
W: 3.39 in (86 mm) and +/- 0.08 in. (+/- 2mm) for height
H: 6.10 in (155 mm) dimensions. All data subject to
 change without notice.


Terminals




Battery Split Bar to meet shipping regulations. See manual for details.



Terminal base, for horizontal cable mount.



L-Terminals included for vertical cable attachment; front or side mount.



Z-Terminals included for horizontal cable attachment; front or side mount.

- Extreme-rate LiFePO4 cell technology
- Ultra light, One-fifth the weight of a lead-acid battery on average
- Zero sulfation for longer service life
- Drop-in replacement for your OEM battery
- Military spec carbon composite case
- Faster cranking for better starts
- Super-fast recharge rate
- No explosive gasses during charge - no lead, no acid
- Environmentally friendly - just discharge and recycle



With Shorai Technology **SHORAI**

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com