



Specification Sheet :FLPL75 SERIES

Project: _____ Type: _____ Model No.: _____

Remarks: _____

Specification:

NO additional electrical or mechanical source required
 Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Approvals:
 Meets NFPA Life Safety Code 101 and OSHA
 Meets International Building and Fire Codes
 Listed through UL 924 for the USA and Canada
 Listed with the State of California State Fire Marshal


Listings & Certifications:



Model: FLPL75



Mechanical Data:

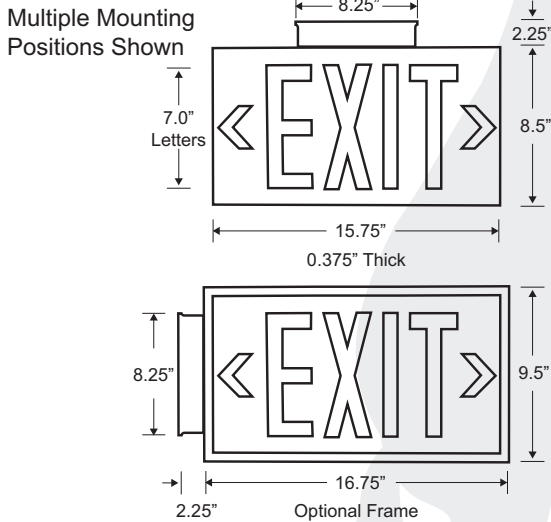

Standard Features:

- No Energy Consumption
- Non-Toxic, Non-Radioactive
- Designed For Surface, Flag And Ceiling Mount
- Thin, Low Profile Construction
- Consistent, Uniform Illumination
- Visible At 75 Feet
- Can Be Used For Both High Level And Low Location Applications
- Tested And Approved For Low Impact
- Requires Virtually No Maintenance – No Bulbs, No Battery Replacement
- Suitable For Floor Proximity Installation
- Field Removable Directional Chevron Indicators
- LEED Points Qualified
- Red Or Green Letters On Photoluminescent Background Can Be Relocated If Path Of Egress Changes

Ordering Information:

Base Model No.	Number of Faces	Letter Color	Frame Color
FLPL75	S - Single	R - Red	B - Black
			R - Red
			G - Green
	D - Dual	G - Green	S - Silver Powder Coat
			W - White
			Blank - No Frame

Build part number by adding Base Model No., one of each Number of Faces, Letter Color and Frame Color. Example: FLPL75-D-G-S

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.