

# MLLWP70LED50DS

LED WALLMAX - LARGE 70W WALL PACK: FULL CUTOFF



DLC Qualified Wall Pack meets full cut off criteria established by the IESNA.

**LED Module:** An efficient, energy saving replacement for metal halide and high-pressure sodium fixtures. Contains an integral listed Driver.

Fixture can mount to electrical box or direct to wall.

## FEATURES:

- Replaces up to 250 Watt Metal Halide
- DLC qualified
- Lumens delivered 4400
- 69 Watts total consumed
- CCT 5000K
- 50,000 hour life at L70 standards
- Self-contained driver
- Universal 120V through 277V
- Maintenance free; no UV
- Dusk To Dawn / Occupancy sensor compatible
- Can mount on electrical box or direct to wall
- LM-79/80 data available
- 5 Year Limited Warranty
- 20W, 30W, and 40W models available
- Does not attract insects

|                  |
|------------------|
| PROJECT NAME     |
| CATALOG NUMBER   |
| NOTES            |
| FIXTURE SCHEDULE |



## CONSTRUCTION:

**Fixture:** Heavy-duty cast aluminum one-piece housing; polyester powder coat paint; rust and corrosion proof. Fixture is sealed to be dirt and insect proof.

**Lens:** High quality tempered glass.

**LED Module:** Copper plating to provide high thermal transfer rate minimizing junction temperature of LED.

**Finish:** Dark Bronze or Textured White



Luminaire Ordering Information:

| WATTS | ORDER CODE | MODEL NUMBER    | LUMENS | L70 LIFE (Hrs) | DIMENSIONS (L"xW"xH") | K    |
|-------|------------|-----------------|--------|----------------|-----------------------|------|
| 70    | 71136      | MLLWP70LED50DS  | 4400   | 50,000         | 16.9 x 13.6 x 9.0     | 5000 |
| 70    | 71132      | MLLWP70LED50DSW | 4400   | 50,000         | 16.9 x 13.6 x 9.0     | 5000 |

MAX11338

Lighting layouts and spacing criteria available upon request

\*Caution: This fixture is DLC compliant and designed for downward illumination only.


# MLLWP70LED50DS

LED WALLMAX - LARGE 70W WALL PACK: FULL CUTOFF




## SPECIFICATIONS:

| Item                | Specification           | Details                                       |
|---------------------|-------------------------|---|
| General Performance | Spacing Criteria        | Available upon request                        |
|                     | Color Temperature       | 5000K   |
|                     | Lumens                  | 4400  |
|                     | Efficacy                | 64 lumen/watt                                 |
|                     | Color Consistency       | Proprietary binning for uniform color         |
|                     | Lumen Maintenance (L70) | 50,000 hours                                  |
| Electrical          | Power Factor            | Over 98%                                      |
|                     | Input Voltage           | 120V-277V 50/60 Hz                            |
|                     | Power Consumption       | 69 Watts                                      |
| Physical            | Dimensions              | 16.9" x 13.6" x 9.0"                          |
|                     | Weight                  | 10.5 lbs                                      |
|                     | Housing                 | Aluminum                                      |
|                     | Lens                    | Tempered glass                                |
|                     | Mounting                | Fits electrical box or mount directly to wall |
|                     | Operating Temperature   | -30°F to 130°F                                |
|                     | Humidity                | 20% - 85% RH, non condensing                  |
| Certification       | Certification           | cETLus, FCC, DLC, LM79, LM80                  |
|                     | Material Usage          | RoHS compliant; no mercury                    |
|                     | Environment             | Outdoor                                       |
|                     | LED Class               | N/A   |

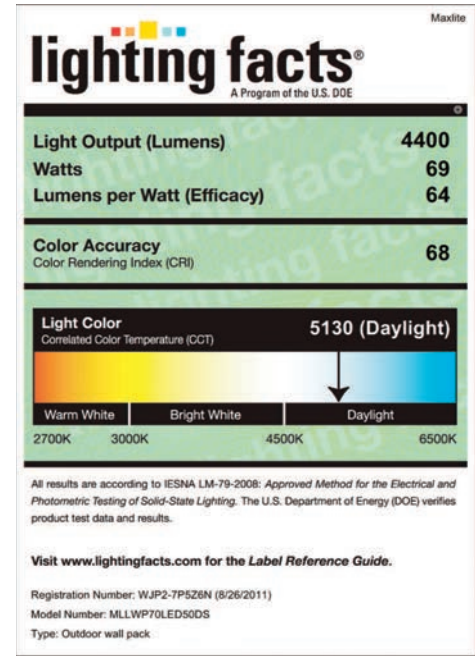

Lighting layouts and spacing criteria available upon request

## DIMENSIONS:

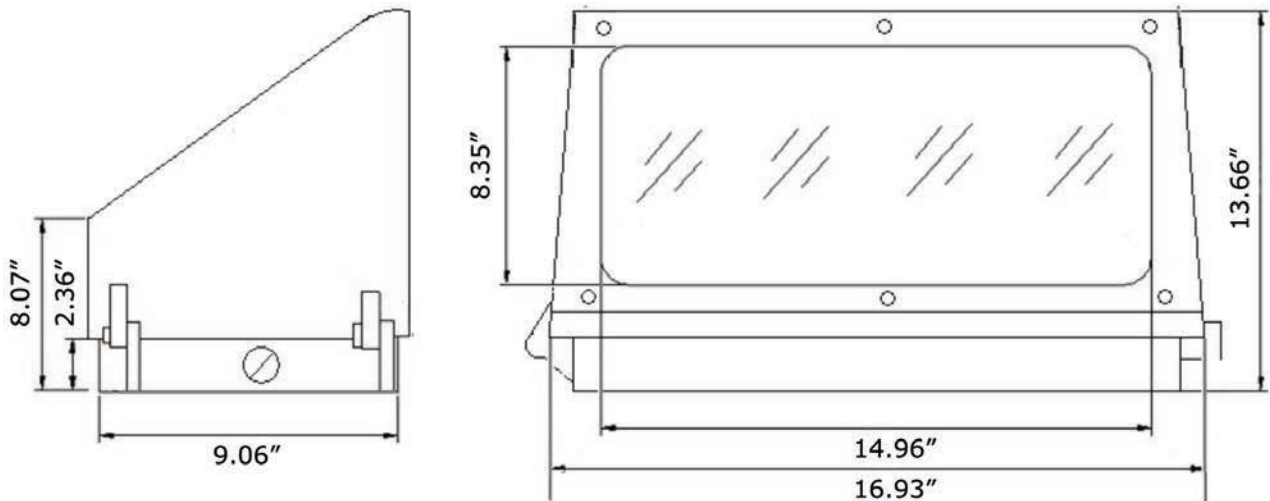


# MLLWP70LED50DS



LED WALLMAX - LARGE 70W WALL PACK: FULL CUTOFF

## PHOTOMETRICS:

MAXIMUM PLANE AND MAXIMUM CONE PLOTS OF CANDELA

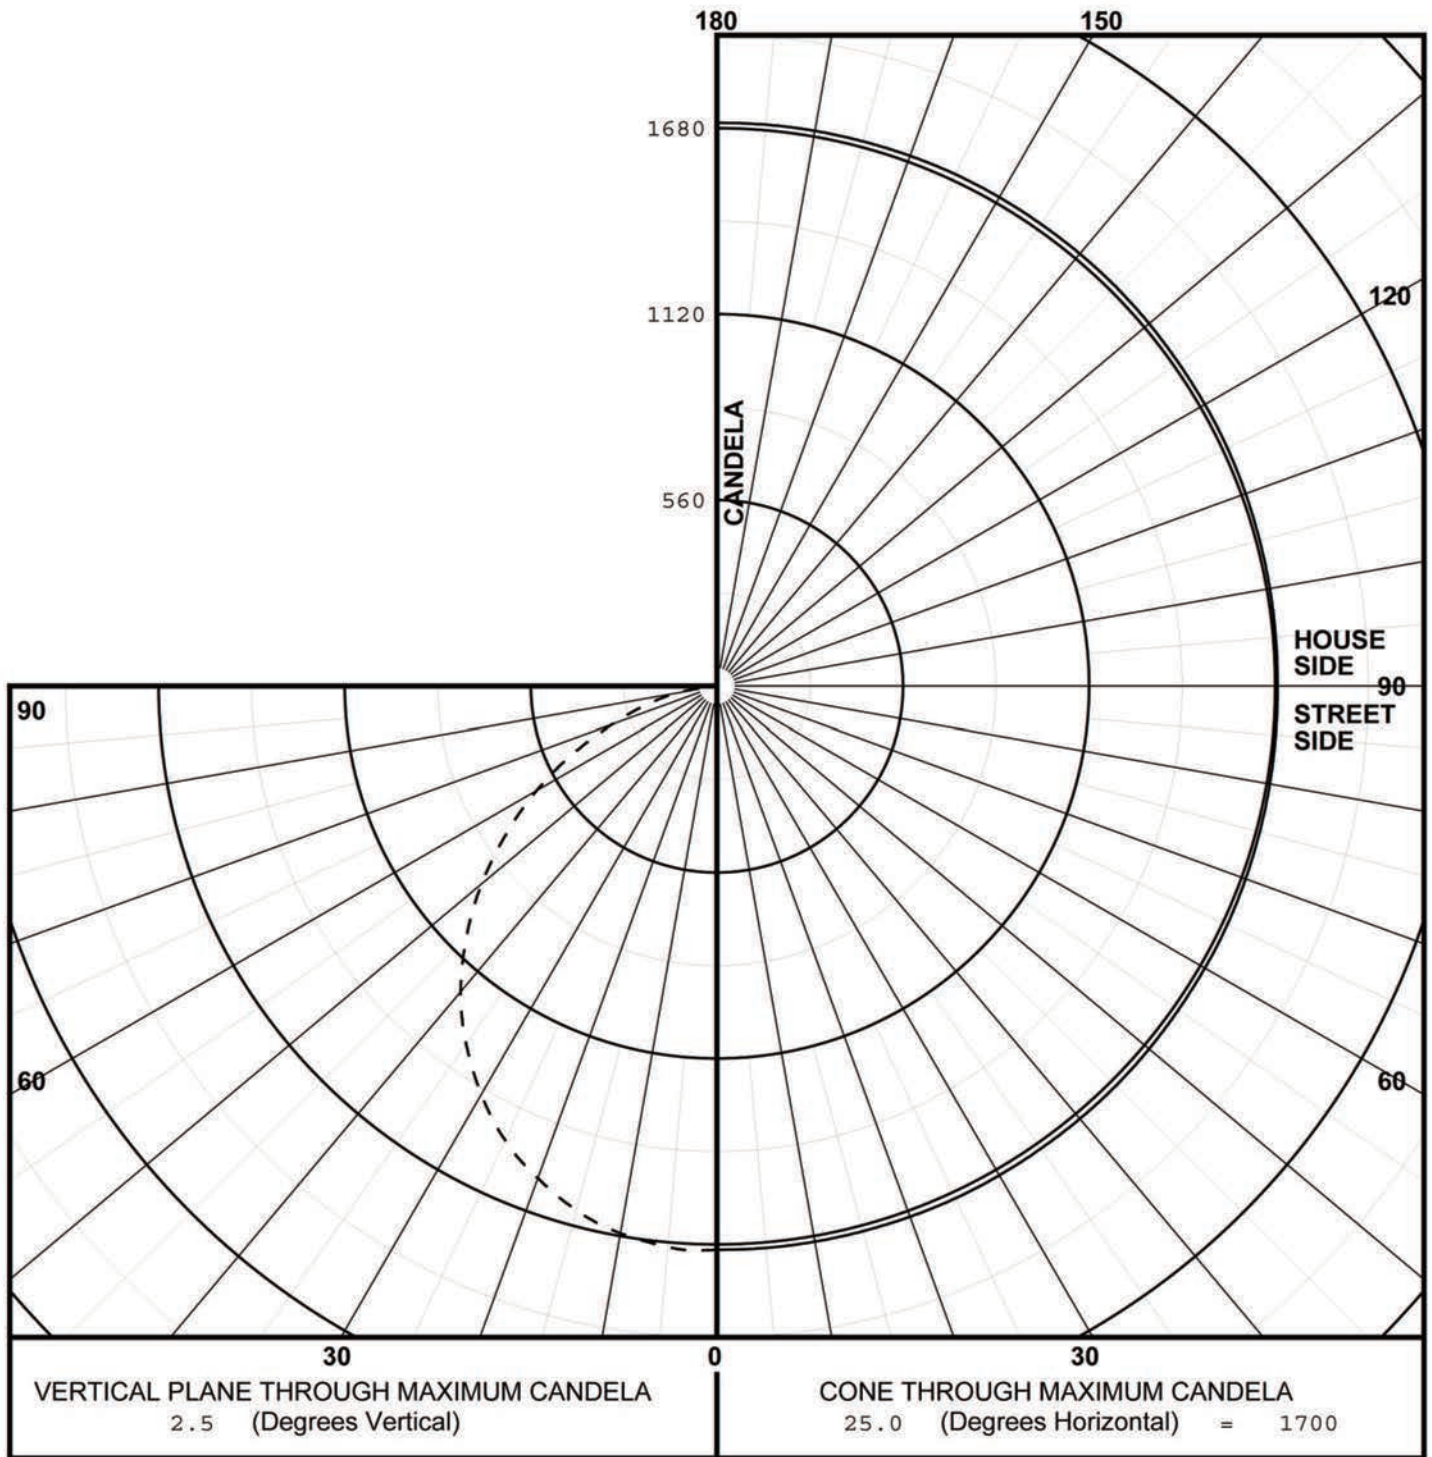

Lighting layouts and spacing criteria available upon request

