


BP210**1/BP2150B1 **Series Ceiling Fans**



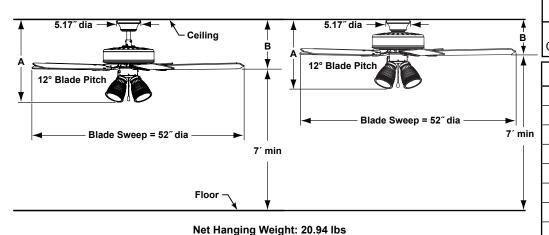

| Fan In Close to Ceiling Configuration | 15.06″ | 7.74″ |
|--|--------|--------|
| | Α | В |
| Fan w/4.5" downrod | 18.70″ | 11.10″ |
| Fan w/12" downrod | 26.20" | 18.60″ |
| Fan w/18" downrod | 32.20″ | 24.60" |
| Fan w/24" downrod | 38.20″ | 30.60″ |
| Fan w/36" downrod | 50.20" | 42.60" |
| Fan w/48" downrod | 62.20" | 54.60" |
| Fan w/60" downrod | 74.20″ | 66.60″ |
| Fan w/72" downrod | 86.20″ | 78.60″ |
| | | |

CFM / Watts

92

128

174

Amps

0.53

0.37

0.21

Blades - Traditional

Watts

29

10

В

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR

153 x 15 this fan.

BLADES:

A set of five 20.7" traditional wood blades is included.

| 5 motor is designed for entimal performance with | OB – Oil-rubbed bronze / Amber | Cherry / walnut reversible |
|--|-----------------------------------|----------------------------|
| | SN – Satin nickel / Frosted white | Cherry / walnut reversible |
| | | |

| Available Finishes-BP2150B | | |
|----------------------------|----------------------|--|
| Fan Assembly / Glass | Blades - Traditional | |
| OB – Oil-rubbed bronze / | Cherry / walnut | |
| Frosted White | reversible | |

Airflow / Energy Efficiency Info (120V)

CFM

5897

3701

1744

Available Finishes-BP210**

Max RPM

188

124

65

MW - Matte white / Frosted white Matte white

Fan Speed

High

Med

Low

Fan Assembly / Glass

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

A 4-bulb (40 watt max candelabra bulbs - included) downlight fixture with 4 glass shades is included with this fan assembly. Maximum downlight wattage not to exceed 160 watts.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6 " downrod. Call technical support for more information.

LOCATION USE:

Fans are rated for dry locations only.