

# **The Zonix™**

## **FP4620 Series**




# **SPECIFICATION SHEET**



*Product Specifications Subject To Change*

**ZONIX™**

# FP4620\*\* / FP4630SN Ceiling Fan

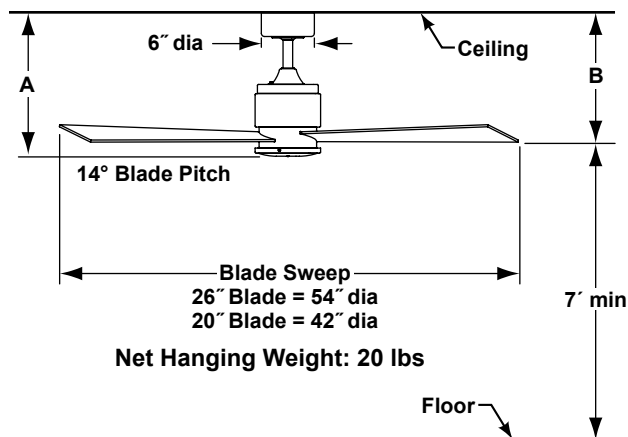

|                   | A      | B      |
|-------------------|--------|--------|
| Fan w/6" downrod  | 15.40" | 12.90" |
| Fan w/12" downrod | 21.40" | 18.90" |
| Fan w/18" downrod | 27.40" | 24.90" |
| Fan w/24" downrod | 33.40" | 30.90" |
| Fan w/36" downrod | 45.40" | 42.90" |
| Fan w/48" downrod | 57.40" | 54.90" |
| Fan w/60" downrod | 69.40" | 66.90" |
| Fan w/72" downrod | 81.40" | 78.90" |

## INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

## BLADES:

A set of three 26" reversible cherry/walnut wood blades is included.

Optional sets of three 20" wood blades are available in reversible cherry/walnut (B4442CWR) and satin nickel (B4442SN) finishes—sold separately. Optional sets of three 20" composite blades are available in cherry (BPW4442CY) and walnut (BPW4442WA) finishes—sold separately.

## CONTROL OPTIONS:

CW40 fan-only wall control is included. Reversing switch located on fan housing. Instructions are provided with each control. Optional C2 wall control and C4 hand-held remote with receiver are available—sold separately.

## LIGHTING OPTION:

A single-bulb downlight fixture with 13 watt, energy-efficient CFL bulb included is available—sold separately. Maximum downlight wattage not to exceed 13 watts. *NOTE: Fan supplied with fan only wall control. Light kit will require use of C25\* wall control and/or C4FL hand-held remote control with receiver unit—sold separately.*

\*C25 wall control must be used with C4 remote control

## DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

## LOCATION USE:

Fan is rated for dry locations only, however, is damp location rated if used with composite blades listed above.

## Available Finishes

|    |                                            |
|----|--------------------------------------------|
| OB | Oil-rubbed bronze—reversible cherry/walnut |
| SN | Satin nickel—reversible cherry/walnut      |
| SN | Satin nickel—satin nickel                  |

## Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High      | 145     | 4529 | 83          | 0.45 | 55    |
| H-Med     | 99      | 2987 | 108         | 0.32 | 28    |
| L-Med     | 70      | 2008 | 133         | 0.23 | 15    |
| Low       | 49      | 992  | 126         | 0.17 | 8     |



celebrating 25 years

**10983 Bennett Parkway  
Zionsville, IN 46077**

**Toll Free (888) 567-2055**

**FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website @ [www.fanimation.com](http://www.fanimation.com)**

*Copyright 2010 Fanimation, Inc.  
All Rights Reserved*



2010/01