
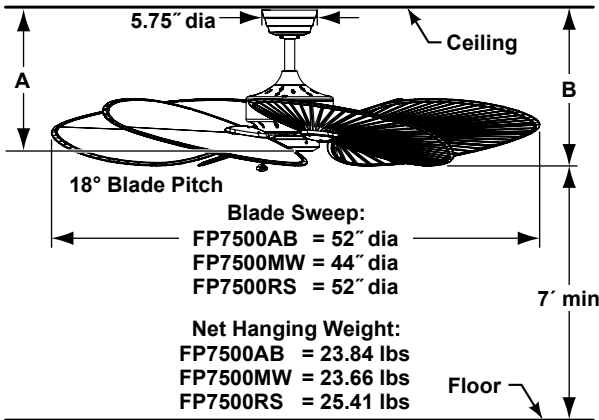


# WINDPOINTE® SERIES

## FP7500\*\* 5-Blade Traditional Model

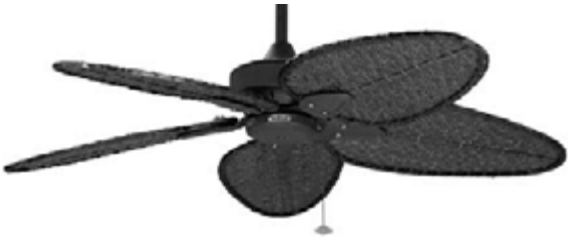

	A	B
Fan w/6" downrod	14.50"	14.00"
Fan w/12" downrod	20.50"	20.00"
Fan w/18" downrod	26.50"	26.00"
Fan w/24" downrod	32.50"	32.00"
Fan w/36" downrod	44.50"	44.00"
Fan w/48" downrod	56.50"	56.00"
Fan w/60" downrod	68.50"	68.00"
Fan w/72" downrod	80.50"	80.00"

Available Finishes	
AB	Antique Brass
MW	Matte white
RS	Rust (Damp)

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version is available.

### BLADES:

A set of five blades is included.

### CONTROL OPTIONS:

Optional C1, C2 and C25\* wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

\*C25 wall control must be used with C4 remote control

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for lighting options.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

### LOCATION USE:

FP7500AB and FP7500MW are rated for dry locations only. FP7500RS is rated for dry and damp locations.

### FP7500AB Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	86	2633	63	0.37	42
Med	82	2337	68	0.34	34
Low	57	1420	86	0.23	17

### FP7500MW Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	122	2812	67	0.37	42
Med	109	2501	73	0.33	35
Low	75	1600	96	0.23	17

### FP7500RS Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	2551	60	0.37	42
Med	86	2272	65	0.34	35
Low	68	1175	71	0.23	17