


INLET™

FPS7880** Snugger Ceiling Fan

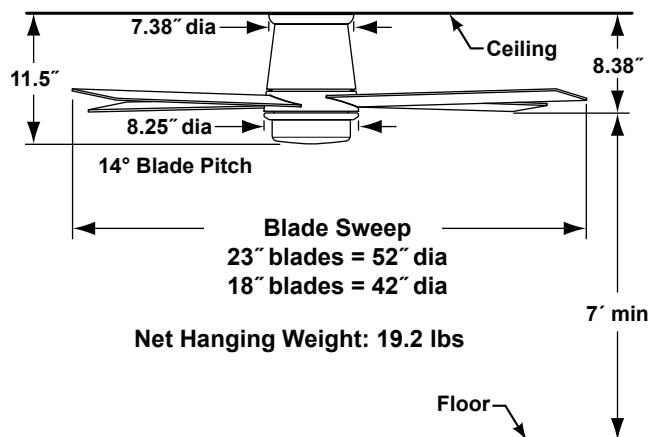

Available Finishes

| | |
|----|---|
| OB | Oil-rubbed bronze with Opal Frosted Glass |
| SN | Satin nickel wit Opal Frosted Glass |



Woven Cherry or Walnut Housing
Accessory—sold separately

HA7880CY/WA

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 170 | 5102 | 86 | 0.50 | 59 |
| Med | 116 | 3296 | 115 | 0.40 | 29 |
| Low | 67 | 1827 | 149 | 0.29 | 12 |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 14 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—170 rpm; Med—116 rpm; Low—67 rpm

BLADES:

A set of four 23" reversible cherry/walnut wood blades is included. Optional A set of four 23" wood blades is available in satin nickel (B7880SN) finish—sold separately. Optional sets of four 18" composite blades are available in cherry (BPW7880CY), satin nickel (BPW7880SN) and walnut (BPW7880WA) finishes—sold separately. Optional sets of four 23" composite blades are available in CY (BPW7823CY), walnut (BPW7823WA) and SN (BPW7823SN)—sold separately.

CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Optional C21 wall control is available. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Instructions are provided with each control.

LIGHTING OPTIONS:

Includes built-in single-bulb downlight fixture with 18-watt, GU24 base, low-profile CFL bulb—included. Maximum downlight wattage not to exceed 18 watts.

LOCATION USE:

Fan is rated for dry locations only. Damp location rated if used with all-weather composite blades listed above.