

Integral Tube

LED

LED 4' Linear Tube 2900k Specifications



The ETi 18 watt 1620 lumen LED 4' tubes offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. These 4' linear LED tubes are high quality replacements for fluorescent lamps and are available in 2900K, 3500K, 4000K & 5000K. They are UL listed for use in damp locations and are RoHS compliant with no lead or mercury. Non-dimmable. Warranty period 5 years or 60 months. Suitable for installations from - 13° F to 113° F.

KEY FEATURES & BENEFITS


- 18 watt Low Power and High Performance
- 1620lms Linear Tube
- 2900K
- UL E349551 - Luminaire conversion kit
- UL E339058 - LED tube and driver system
- Rated Lifetime: 50,000 hours
- Easy, fast & safe installation



• wire to one endcap

This light source meets restrictions on hazardous substances.

LAMP DIMENSIONS



SKU# 54108111
Dimension A = 1.2"
Dimension B = 47.2"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us

APPLICATION INFORMATION

Typical applications for the LED tubes include retrofitting existing fluorescent fixtures. Includes; homes, museums, galleries, shop windows, restaurants, meeting rooms and hotel/motel locations.



LED 4' Tube 2900k

LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Description	Wattage	Base Type	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	R9	Power Factor	DUV	CBCP	90-270° Beam Angle
54108111	LED18w4ftT8tube 829NDIM	18	G13	120-277V	50,000	1,620	2900k	81.7	21.7	≥0.9	.0015	400	129.1
¹ Hours lifetime with 70% lumen maintenance													
² Thermally stable typical lumens (±10%)													
³ Thermally stable CCT (±10%)													
⁴ Color rendering index													

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54108111	83660707629	1.4" x 49.5" x 1.4"	1.1	N/A	N/A	N/A	N/A	15	50836607007624	8.3" x 50.3" x 5.0"	18.1

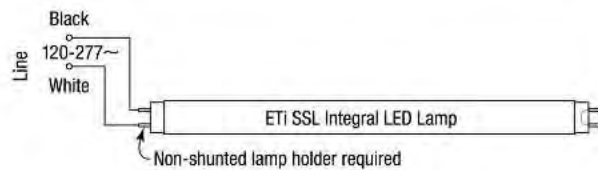

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754 www.etiled.us