


| | |
|----------|---------------|
| Project: | Toshiba Lamp: |
| Type: | Notes: |

PAR30 Long

Ordering Information

| Ordering Code | Input Voltage (VAC) | Lamp Shape | Base Type | CCT ¹ | Initial Lumens (lm) ² | Beam Angle | Wattage (W) | Lamp Efficacy (lm/W) | Rated Life (hrs) ³ | CBCP (cd) | CRI | Power Factor | Equivalency ⁴ | Lamp Weight lb (g) |  |
|----------------|---------------------|------------|-----------|------------------|----------------------------------|------------|-------------|----------------------|-------------------------------|-----------|-----|--------------|--------------------------|--------------------|---|
| 13P30L/27INF-T | 120 | PAR30 | E26 | 2700K | 780 | 25 | 12.5 | 62.4 | 40,000 | 3600 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |
| 13P30L/27IFL-T | 120 | PAR30 | E26 | 2700K | 780 | 35 | 12.5 | 62.4 | 40,000 | 1650 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |
| 13P30L/30INF-T | 120 | PAR30 | E26 | 3000K | 800 | 25 | 12.5 | 64.0 | 40,000 | 3800 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |
| 13P30L/30IFL-T | 120 | PAR30 | E26 | 3000K | 800 | 35 | 12.5 | 64.0 | 40,000 | 1750 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |
| 13P30L/40INF-T | 120 | PAR30 | E26 | 4000K | 800 | 25 | 12.5 | 64.0 | 40,000 | 3800 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |
| 13P30L/40IFL-T | 120 | PAR30 | E26 | 4000K | 800 | 35 | 12.5 | 64.0 | 40,000 | 1750 | 81 | 0.95 | 75W Halogen | 0.57 (260) | ● |


- CCT Range complies to ANSI C78.377-2008.
- Thermally stable typical lumens (± 10%)
- Rated life is based on 70% lumen maintenance and engineering testing and probability analysis; life hours per ENERGY STAR® may vary.
- Equivalency based on the ENERGY STAR® Integral LED Lamp Center Beam Intensity Benchmark Tool.

Note: All information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party facility. All lamps meet ENERGY STAR Integral LED Lamp requirements and will be submitted for testing. Five-year warranty based on 12 hr/day usage. Toshiba LED Lighting Systems Division reserves the right to make changes and/or improvements in designs and/or dimensions without notice or obligation.



Dimensions

Model PAR30 Long
 MOL (A) 4.52" (114.8 mm)
 Diameter (B) 3.74" (95 mm)

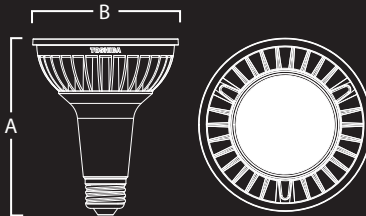

Note: Lamp shape conforms to ANSI C78.21-2003. Designed to comply with RoHS Directive 2002/95/EC.


Energy Savings

| Ordering Code | 50W Halogen | 65W Halogen | 75W Halogen |
|----------------|-------------|-------------|-------------|
| 13P30L/30INF-T | \$165.00 | \$231.00 | \$275.00 |
| 13P30L/30IFL-T | \$165.00 | \$231.00 | \$275.00 |
| 13P30L/40IFL-T | \$165.00 | \$231.00 | \$275.00 |

Note: Energy savings based on using one bulb for 40,000 hr rated life at 11c/kWh. Does not include maintenance and replacement lamp savings.

Illuminance Cone Diagrams

13P30L/30INF-T

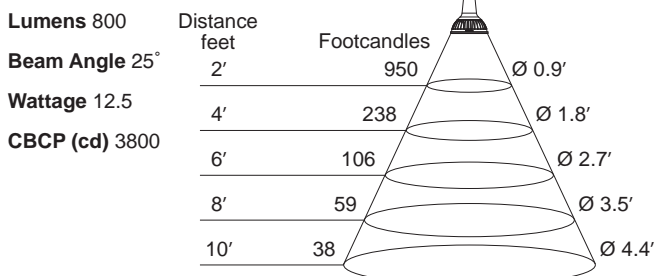

13P30L/40IFL-T

