

LED Series

TRS1 Mini Triad 90° Full Cutoff Wall Sconce



TRS1

Housing:

Die Cast Aluminum Housing with Integral Heat Sinks for Cooler Operating Temperatures. UV-Resistant DuPont Powdercoat Paint Over a Chromate Conversion Coating for Added Durability. Stainless Steel Fasteners and Formed Silicone Gaskets.

Mounting:

Mount Over a 4" Recessed Outlet Box or Use Optional Cast Aluminum Mounting Plate (Sold Separately)

LG LED Module:

Luminous Flux: See Chart
CRI: 70+, CCT: 4000K, 5700K or 6500K
Operating Temperature: -40 ~ 50°C
50,000 Hours
Module has IP67 Rating
RoHS Compliant

Wattage:

LED: 1 x 9 or 12w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Listing & Ratings:

CSA: Listed for Wet Locations

Options:

Dimmable Driver

Custom Colors Available Upon Request.

TRS1 Mini Triad 90° Full Cutoff Wall Sconce

Catalog

Description

Complete Units

Ordering Information

Example: TRS1LF1X12U4KZ


TRS1	Model:	TRS1
L	LED Mfr:	L=LG Innotek
F	Optics:	C=Type III, F=Medium Beam Spread
1X	Number of Modules:	1X=One
12	Wattage:	9=9w, 12=12w
U	Ballast:	U=120-277V
4K	Color Temp:	4K=4000K, 57K=5700K, 65K=6500K
Z	Color:	Z=Bronze
-	Mounting:	N/A
-	Options:	SF=Single Fuse, DF=Double Fuse

LD

Total Luminous Flux per Module

		Optic Type					
		C		F		I	
		12w	9w	12w	9w	12w	9w
CCT	6500K	1288	850	1345	888	1296	856
	5700K	1288	850	1345	888	1296	856
	4000K	1076	710	1100	726	1088	718

DIMENSIONS

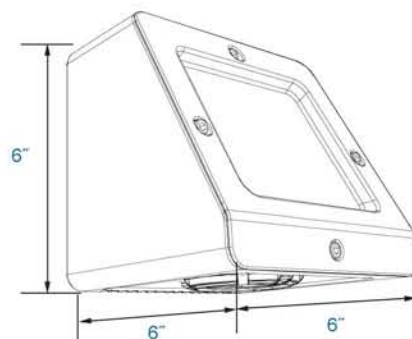

TRS1

LED Series

TRS1 Mini Triad 90° Full Cutoff Wall Sconce

Catalog #	Description
WPMP	Die Cast Wall Mount Plate with Locknut, O-ring & Weatherproof Gasket



WPMP

LD