

Ceramalux Instant Restrike

Ceramalux Instant Restrike 1000W Mog E25 CL



Dual arc-tube delivers 40,000 hour rated average life as compared to 24,000 hour rated average life for standards HPS lamps. Ideal for industrial applications, warehouses, post top applications and parking lots.

Product data

• General Characteristics

Base	Mogul [Mogul]
Base Information	Nic/Brass [Nickel/Brass Base]
Bulb	E25
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
Main Application	General and Street Lighting
Rated Avg. Life	24000 hr

• Light Technical Characteristics

Color Rendering Index	21 Ra8
Color Temperature	2100 K
Color Temperature technical	2100 K
Initial Lumens	135000 Lm
Luminous Efficacy Lamp	135 Lm/W
Design Mean Lumens	126000 Lm
Chromaticity Coordinate X	517 -
Chromaticity Coordinate Y	420 -

• Electrical Characteristics

Watts	1000 W
Lamp Voltage	235 V
Lamp Current	4.7 A
Ignition Time	5 (max) s
Re-ignition Time [sec]	1 (max) s

• Environmental Characteristics

Mercury (Hg) Content	79.2 (max) mg
----------------------	---------------

• Luminaire Design Requirements

Cap-Base Temperature	210 (max) C
Bulb Temperature	400 (max) C

• Product Dimensions

Light Center Length L	8.75 in
Max Overall Length (MOL) - C	15.063 (max) in
Diameter D	3.125 in

• Product Data

Product number	204123
Full product name	Ceramalux Instant Restrike 1000W Mog E25 CL
Short product name	Ceramalx Inst Rstrk 1000W Mog E25 CL
Pieces per Sku	1
eop_pck_cfg	6
Skus/Case	6
Bar code on pack	46677204129
Bar code on case	50046677204124
Logistics code(s)	928601145301
eop_net_weight_pp	0.001 kg



PHILIPS

sense and simplicity

Dimensional drawing

Ceramalux Instant Restrike 1000W Mog E25 CL

Product	C (Max)	D (Norm)
HPS 2 1000W E39 E25 U	15.063	3.125

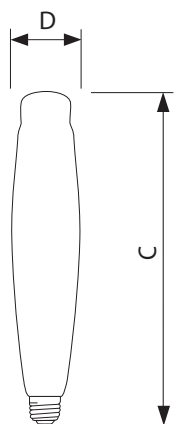

E39



© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, May 13
data subject to change