

Model Number:

Approvals:

Accessories:

Type:

Job:

PRODUCT SPECIFICATIONS

CONSTRUCTION

The Trace-lite TL501 Series features a durable, corrosion-resistant, die-cast aluminum ballast enclosure with a white powder coated finish. The ballast compartment features external, heat-dissipating fins to extend ballast life. The spun anodized aluminum 16" or 22" reflector provides smooth even illumination. Other reflector options are available.

LAMPS & BALLASTS

High Pressure Sodium: Lamps from 250 to 400 watts, utilizing an EX39 mogul based, open rated (pink) porcelain socket pulse rated for 4KV with a CWA type ballast rated for a minimum operating temperature of -30°C (-22°F) and Multi-tap (120/208/240/277VAC) or 480VAC input.

Pulse Start Metal Halide: Lamps from 250 to 400 watts, utilizing an EX39 mogul based, open rated (pink) porcelain socket pulse rated for 4KV with a CWA ballast rated for a minimum operating temperature of -30°C (-22°F) and Multi-tap (120/208/240/277VAC) or 480VAC input.

INSTALLATION

The Trace-lite TL501 Series features an easy-access wiring compartment, and comes complete with mounting hook. Optional pendant mount and line cord kits are also available.


WARRANTY

Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Igniters are warranted for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ORDERING INFORMATION

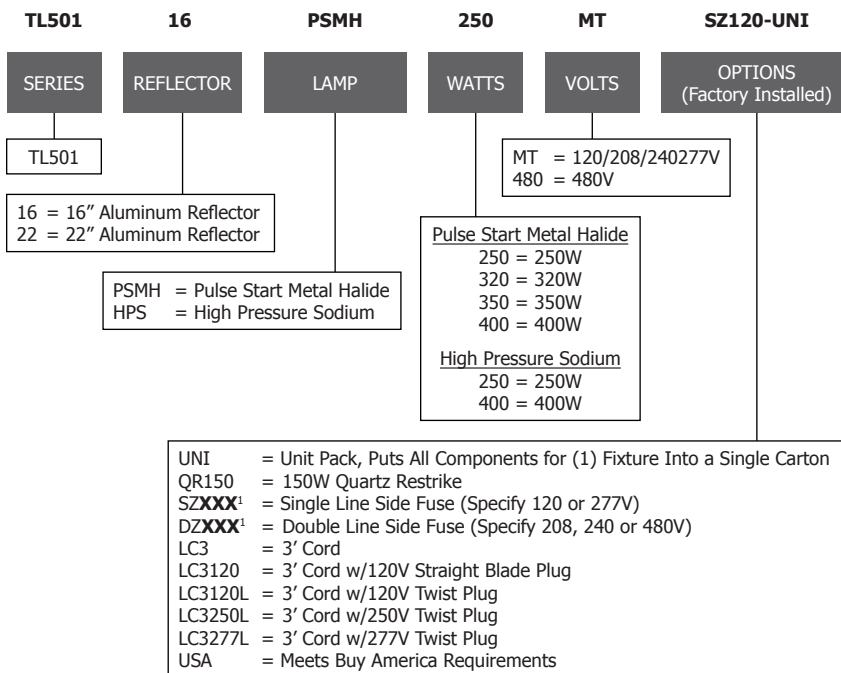


LC3120L
ACCESSORIES ³ (Field Installed)
SWPS500 = Swivel Pendant Mount (Square Box) SWPR500 = Swivel Pendant Mount (Round Box) ALR50016 = 16" Replacement Aluminum Reflector ALR50022 = 22" Replacement Aluminum Reflector WG50016 = 16" Wire Guard (Requires CB50016) WG50022 = 22" Wire Guard (Requires CB50022) FA50016 ² = 16" Flat Acrylic Lens (Requires CB50016) FA50022 = 22" Flat Acrylic Lens (Requires CB50022) FG50016 ² = 16" Flat Glass Lens w/Gasket (Requires CB50016) FG50022 = 22" Flat Glass Lens w/Gasket (Requires CB50022) CA50016 ² = 16" Conical Acrylic Lens (Requires CB50016) CA50022 = 22" Conical Acrylic Lens (Requires CB50022) DL50016 ² = 16" Acrylic Drop Lens (Requires CB50016) DL50022 = 22" Acrylic Drop Lens (Requires CB50022) CB50016 = 16" Tool-Less Clamp Band CB50022 = 22" Tool-Less Clamp Band LC3 = 3' Cord LC3120 = 3' Cord w/120V Straight Blade Plug LC3120L = 3' Cord w/120V Twist Plug LC3250L = 3' Cord w/250V Twist Plug LC3277L = 3' Cord w/277V Twist Plug SFC500 = Safety Cable


¹ Specify Voltage
² 250 Watt Max
³ Order as Separate Line Item

SAMPLE PHOTOMETRICS

TL501-16-PSMH-400 Mounted at 30'

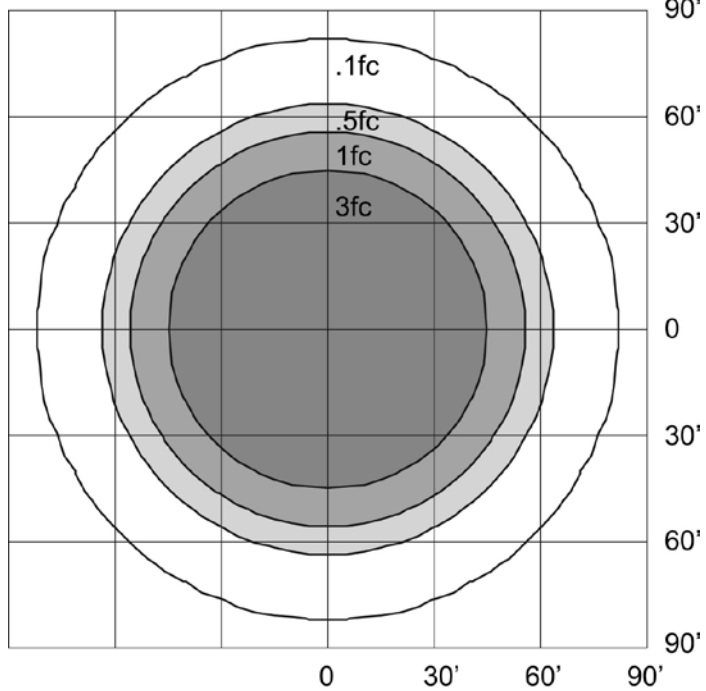

DIMENSIONS

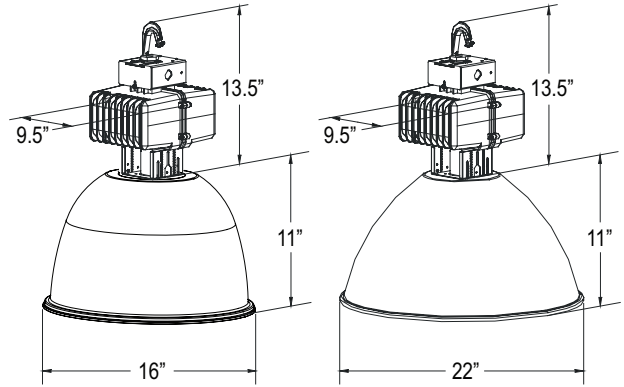

Approximate Weight: 12 lbs

TL501-22-PSMH-400 Mounted at 30'

