


**NTM-30 / NTM-31 / NTM-32 / NTM-33 / NTM-34
BR30/PAR30 Stepped Baffle with Ring**

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS



Trim OD: 7-1/8" (Oversize: 7-3/4")
Aperture: 5-3/4"
Height: 2-3/4"

FEATURES

Trim
Precision spun 0.040 baffle insert with deep grooves to reduce aperture glare. Non-reflective painted finishes. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting
Trim includes two coil springs that clip and securely hold the trim into the housing when installed. Replacement coil springs are available (NRA-22).


Compatible Housings
Compatible with shallow, standard, and IC Line Voltage housings listed below. See individual specification sheets for more information.

Lamp
Line Voltage
75W BR30/PAR30 Maximum
(NH-26Q; NH-27Q; NHIC-17/100DWQA; NHIC-17QAT; NHIC-27QAT; NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-27QAT)


Labels and Listings
cULus Listed for Damp Location when used with compatible housing
UL Classified for use with most manufacturer' housings

HOUSING DIMENSIONS


NH-26Q / NH-27Q / NHIC-17QAT / NHIC-27QAT

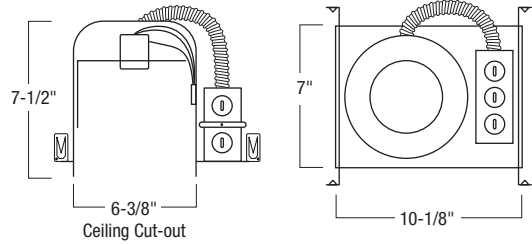


NH-27Q / NHIC-27QAT

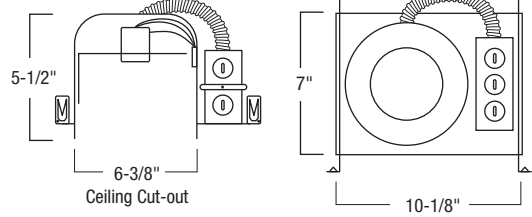


NHIC-17/100DWQA

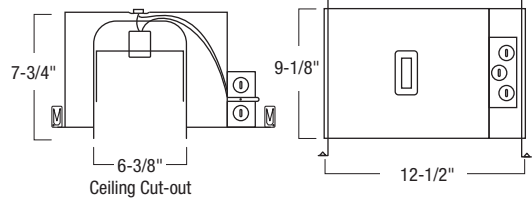

NHR-26Q / NHRIC-17QAT

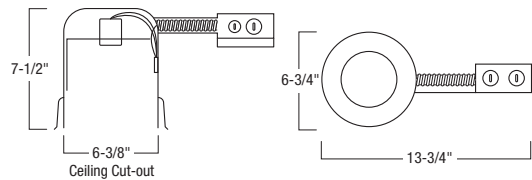

NHR-27Q / NHRIC-27QAT

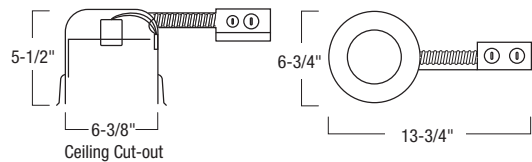

BR30/PAR30 Stepped Baffle with Ring

* Includes Regular and Oversize White Plastic Ring

- | | |
|---|--|
| <input type="checkbox"/> NTM-30: Black Stepped Baffle w/ White Plastic Ring | <input type="checkbox"/> NTM-31/2R*: White Stepped Baffle w/ Two White Plastic Rings |
| <input type="checkbox"/> NTM-30/OV: Black Stepped Baffle w/ Oversize White Plastic Ring | <input type="checkbox"/> NTM-31AC: Chrome Stepped Baffle w/ Chrome Plastic Ring |
| <input type="checkbox"/> NTM-30/2R*: Black Stepped Baffle w/ Two White Plastic Rings | <input type="checkbox"/> NTM-31B: White Stepped Baffle w/ Black Plastic Ring |
| <input type="checkbox"/> NTM-30B: Black Stepped Baffle w/ Black Plastic Ring | <input type="checkbox"/> NTM-31BZ: White Stepped Baffle w/ Bronze Metal Ring |
| <input type="checkbox"/> NTM-30C: Black Stepped Baffle w/ Chrome Plastic Ring | <input type="checkbox"/> NTM-31C: White Stepped Baffle w/ Chrome Plastic Ring |
| <input type="checkbox"/> NTM-30CO: Black Stepped Baffle w/ Copper Metal Ring | <input type="checkbox"/> NTM-31G: White Stepped Baffle with Gold Plastic Ring |
| <input type="checkbox"/> NTM-30G: Black Stepped Baffle w/ Gold Plastic Ring | <input type="checkbox"/> NTM-31N: White Stepped Baffle w/ Natural Metal Ring |
| <input type="checkbox"/> NTM-30N: Black Stepped Baffle w/ Natural Metal Ring | <input type="checkbox"/> NTM-32: Natural Metal Stepped Baffle w/ Natural Metal Ring |
| <input type="checkbox"/> NTM-31: White Stepped Baffle w/ White Plastic Ring | <input type="checkbox"/> NTM-33: Copper Stepped Baffle w/ Copper Metal Ring |
| <input type="checkbox"/> NTM-31/OV: White Stepped Baffle w/ Oversize White Plastic Ring | <input type="checkbox"/> NTM-34: Bronze Stepped Baffle w/ Bronze Metal Ring |

Compatible Housings

LINE VOLTAGE	
Item Number	Installation Type
<input type="checkbox"/> NH-26Q	Non-IC New Construction
<input type="checkbox"/> NH-27Q	Non-IC Shallow New Construction
<input type="checkbox"/> NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction
<input type="checkbox"/> NHIC-17QAT	IC Air-Tight New Construction
<input type="checkbox"/> NHIC-27QAT	IC Air-Tight Shallow New Construction
<input type="checkbox"/> NHR-26Q	Non-IC Remodel Housing
<input type="checkbox"/> NHR-27Q	Non-IC Shallow Remodel Housing
<input type="checkbox"/> NHRIC-17QAT	IC Air-Tight Remodel Housing
<input type="checkbox"/> NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing