


NL-670
Baffle with Adjustable Spot Cylinder and Ring

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS

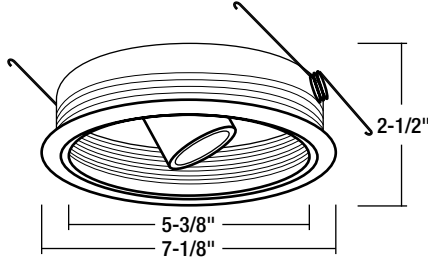

Trim OD: 7-1/8"
 Aperture: 5-3/8"
 Height: 2-1/2"

FEATURES

Trim
 Precision spun metal baffle with deep grooves to reduce aperture glare. Non-reflective painted finishes. Adjustable metal trim can be rotated 358° horizontally and 35° vertically. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

Compatible Housings
 Compatible with Line Voltage housings, Low Voltage housings, Low Voltage retrofit kits, and Line Voltage MR16 GU10 retrofit kits. See individual specification sheets for more information.

Lamp
Line Voltage
 45W PAR16 Max. (NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHIC-27QAT; NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-17QNBAT; NHRIC-27QAT)

Low Voltage
 20W-50W 12V MR16 (NLIC-601 Series; NL-601 Series; NLR-604 Series)
 20W-75W 12V MR16 (NL-601/75 Series; NLR-604/75 Series)
Line Voltage Retrofit Kits
 50W 120V MR16 GU10 Max. (NRA-34/10; NRA-37/10)
Low Voltage Retrofit Kits
 20W-50W 12V MR16 (NLK-2600; NLK-2600EL)

Labels and Listings
 cULus Listed for Damp Location when used with compatible housing

Compatible Housings

LINE VOLTAGE		
Item Number	Installation Type	Dimensions
NH-26Q	Non-IC New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NH-26QNB	Non-IC New Construction - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NH-27Q	Non-IC Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17QNBAT	IC Air-Tight New Const. - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-27QAT	IC Air-Tight Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
NHR-26Q	Non-IC Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHR-27Q	Non-IC Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
NHRIC-17QAT	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QNBAT	IC Air-Tight Remodel - No Bracket	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
LOW VOLTAGE		
NL-601Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277/75Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NLIC-601QAT	IC Air-Tight New Construction - 120V Mag.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/1EL	IC Air-Tight New Construction - 120V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/2EL	IC Air-Tight New Construction - 277V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLR-604Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277/75Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
LINE VOLTAGE RETROFIT KITS		
NRA-34/10	Non-IC - Without Lamp	Medium Base Socket adapter
NRA-37/10	Non-IC - With 50W Lamp	Medium Base Socket adapter
LOW VOLTAGE RETROFIT KITS		
NLK-2600	Non-IC - 120V Magnetic	W: 4-1/2" L: 4-3/4" H: 5-1/8"
NLK-2600EL	Non-IC - 120V Electronic	W: 5-1/8" L: 5-1/2" H: 4-1/2"

Baffle with Adjustable Spot Cylinder and Ring

- NL-670B: Black Baffle and Adjustable Spot Cylinder with White Plastic Ring
- NL-670BZ: Bronze Baffle and Adjustable Spot Cylinder with Bronze Metal Ring
- NL-670CO: Copper Baffle and Adjustable Spot Cylinder with Copper Metal Ring
- NL-670N: Natural Metal Baffle and Adjustable Spot Cylinder with Natural Metal Ring
- NL-670W: White Baffle and Adjustable Spot Cylinder with White Plastic Ring