



PERFORMANCE

- Long life: 25,000 hours
- 8W 116° beam angle replaces 40W A19
- 10W 120° beam angle replaces 60W A19
- 12W 330° beam angle replaces 60W A19
- +80 CRI
- 120V @ 60Hz
- Operates from -20°C (-4°F) to 45°C (113°F)

TYPICAL APPLICATIONS

- Task Lighting
- Accent/Display Lighting
- Retail
- Recessed Lighting
- Hospitality
- Residential

FEATURES

- Direct replacement for standard incandescent A lamps
- Omnidirectional beam angle is ideal for table lamps
- Lasts 30x longer than standard incandescent
- High power LED efficiency
- Dimmable to 5% for design flexibility
- Compatible with a wide array of dimmers
- Comfortable diffuse light
- Instant-On with no warm up, unlike CFLs
- Acceptable for ICAT rated downlights
- Available in 2700K, 3000K, and 4100K

TESTS & CERTIFICATIONS

- 5 year limited warranty
- RoHS Compliant
- UL listed for damp locations
- Non enclosed rated
- No mercury or UV/IR emissions
- IESNA LM-79-08 Report Available
- IESNA LM-63-2002 Photometric File Available

LITESPAN[™]
LED






RoHS
Compliant

DIMENSIONAL DRAWINGS



CONE OF LIGHT

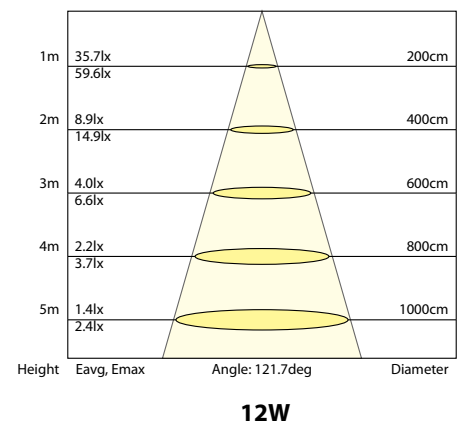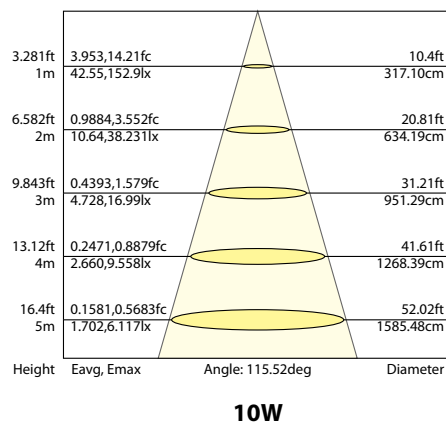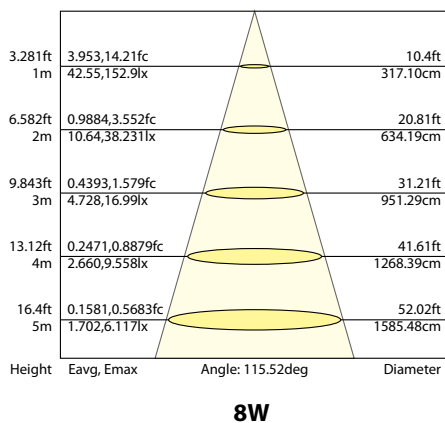

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



CERTIFIED GREEN

LITESPANLED® A19

Dimmable

	ES	LitespanLED® Part #	Description	Lumens	Equiv. to Std. Lamp by Lumen	MOD	MOL	Rated Hours
8W		LEDP-8WA19/827-DIM3	8 Watt A19 Non-Standard - Dimmable 2700K	435	40W A19	2.28"	4.25"	25,000
	★	LEDP-8WA19/830-DIM3	8 Watt A19 Non-Standard - Dimmable 3000K	450				25,000*
		LEDP-8WA19/841-DIM3	8 Watt A19 Non-Standard - Dimmable 4100K	470				25,000
10W	★	LEDP-10WA19/827-DIM3	10 Watt A19 Non-Standard - Dimmable 2700K	800	60W A19	2.36"	4.41"	25,000*
		LEDP-10WA19/830-DIM3	10 Watt A19 Non-Standard - Dimmable 3000K	830				25,000
		LEDP-10WA19/841-DIM3	10 Watt A19 Non-Standard - Dimmable 4100K	860				25,000
12W	★	LEDP-12WA19/827-DIM3	12 Watt A19 Omnidirectional - Dimmable 2700K	800	60W A19	2.36"	4.41"	25,000*
		LEDP-12WA19/830-DIM3	12 Watt A19 Omnidirectional - Dimmable 3000K	800				25,000
		LEDP-12WA19/841-DIM3	12 Watt A19 Omnidirectional - Dimmable 4100K	860				25,000

★ ENERGY STAR approved

*ENERGY STAR mandates a maximum published threshold of 25,000 hrs after 6,000 hr testing



23220 W. 84th St., Shawnee, KS 66227 • Ph: 1.800.852.2217 • Fax: 1.800.492.8975 • eiko@eiko.com

EiKO CANADA: 81 King Street, Barrie, ON L4N 6B5, Canada • Ph: 1.888.410.8151 • Fax: 1.888.705.1335 • orderdesk@eiko.com

www.eiko.com