

DESCRIPTION

CATALOG: E-725-U-254-R1-S	BALLAST TYPE: Electronic	STARTING METHOD: Programmed Rapid Start	NUMBER OF LAMPS - LAMP TYPE: 1 or 2 F54T5, 1 or 2 FC12T5HO
-------------------------------------	------------------------------------	---	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 - 277 V~ +/- 10%	LAMP WATTS: 54/55 W	INPUT WATTS: 54 to 116 W	INPUT CURRENT: 0,48 - 1,05 A	OCV: 425 V~ Min	PF: > 0,98	FREQUENCY: 50 / 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 85%	BEF: 0,7	LAMP CONNECTION: Series	THD (1): < 10 %	NO PCB'S

(1) FOR 2-F54T5

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	N/A	16,0625	16,375	1,1875	16,5	1,125
	TOL(+/-)		0,0125	0,0125	0,0125	0,0125	0,0125
	MM	N/A	407,9	415,9	30,2	419,1	28,6
	TOL(+/-)		0,31	0,31	0,31	0,31	0,31
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES	N/A	N/A	N/A	N/A	N/A		
TOL(+/-)							
MM	N/A	N/A	N/A	N/A	N/A		
TOL(+/-)							


CARTON CHARACTERISTICS

UNITS/CARTON 10	CARTONS/LAYER 14	# OF LAYERS 10	UNITS/PALLET 1400	PIECE WEIGHT 0,57 Kg.	CARTON WEIGHT 5,9 Kg.	PALLET WEIGHT 848 Kg.
CARTONS/PALLET 140	CARTON DIMENSIONS 44,5 x 17,3 x 7,5 cm.		PALLET DIMENSIONS 8,8 x 121,1 x 75,1 cm.		PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 101,6 x 121,9 x 76,2 cm.	

MISC.

CARTON LABEL

ELECTRICAL DIAGRAM

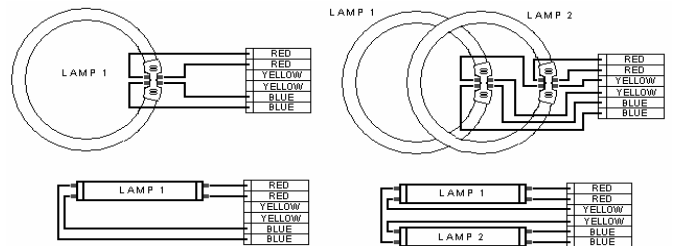

PRODUCT LABEL



Lighting and Power Source
 2840 Keller Springs Road,
 Suite 1102 & 1103
 Carrollton, TX 75006 - 4832
 Tel : (888) 385-4448
 Fax : (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.