


Specification Sheet : HH-MH-MLT4-175P

175W M152/M137 60 Hz CWA
Core & Coil Ballast Status: Active

Mechanical Data:

4.25" x 4.75" CORE-2 COIL UNIT

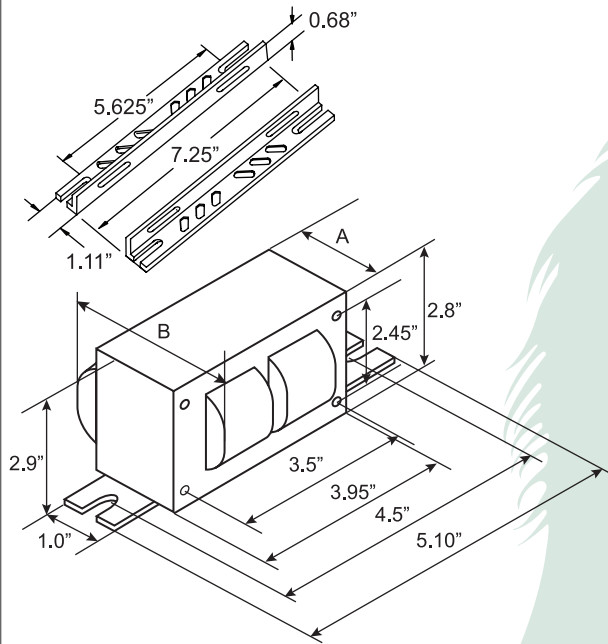

DIMENSION A	3.10 IN
DIMENSION B	4.72 IN
TOTAL WEIGHT	9.29 LBS
LEAD LENGTHS	12 IN

HARDWARE KIT: HH-MH-HDW5 CLAMP: HH-MH-IGCLMP
2 5" Thru-Bolts 4 Flat Washers
2 Lock Washers 2 Nuts

Electrical Data:

INPUT VOLTS
MINIMUM STARTING TEMPERATURE
POWER FACTOR
ANSI CODE
CIRCUIT TYPE
WATTS INPUT
MAX INPUT CURRENT
NOM. OPEN CIRCUIT VOLTAGE
RECOMMENDED FUSE (Amps)
REGULATION


LINE VOLTS
LAMPS WATTS
INPUT WATTS AT LAMP DROPOUT
LINE CURRENT (AMPS)
OPERATING
OPEN CIRCUIT
STARTING
UL TEMPERATURE RATINGS
INSULATION CLASS
COIL TEMPERATURE CODE
CAPACITOR REQUIREMENT
MFD
MIN VOLT

IGNITOR
PART NUMBER
MAX DIST TO LAMP

60Hz TEST PROCEDURES
HIGH POTENTIAL TEST (VOLTS)
OPEN CIRCUIT VOLTAGE TEST (VOLTS)
SHORT CIRCUIT CURRENT TEST (AMPS)
SECONDARY CURRENT
INPUT CURRENT


120	208	240	277
-20°F or -30°C			
90%			
175 WATTS LAMP, M152/M137			
CWA			
198			
1.817	1.039	0.897	0.755
283			
5	3	3	2
±10%			
±10%			
73	110	130	152
1.817	1.039	0.897	0.755
0.810	0.468	0.406	0.353
1.614	0.935	0.811	0.701
A	A	A	A
H(180)			
1029			
11uF			
370			
HH-MH-IG175-200			
2 FT			
1 MIN: 2000, 2 SEC: 2500			
258-308			
1.59-1.95			
1.565	0.970	0.786	0.682

Ignitor:

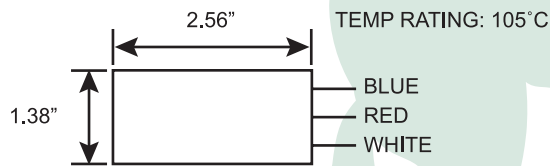


Capacitor:

Dry Capacitor: HHMH-DCAP-175P

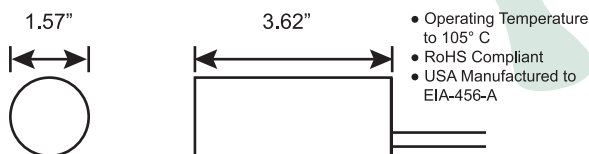

Wiring Diagram:

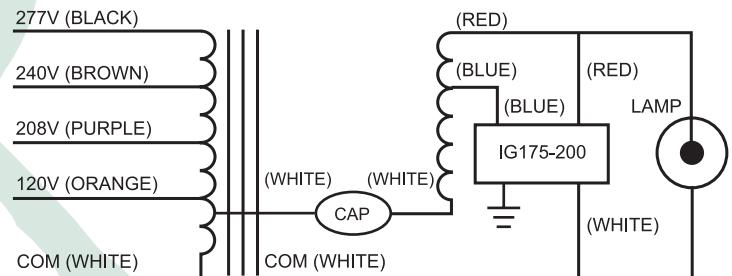

Options:

Basic Ballast Kit includes Ballast, Ignitor and Mounting Hardware only.
For capacitor option, add Base Model No. and one Capacitor code:
D = Dry Kit: Ballast + Ignitor + Dry Capacitor + Mounting Hardware
W = Wet Kit: Ballast + Ignitor + Wet Capacitor + Mounting Hardware

HID Ballast and Lamp Kits also available; please see website www.fulham.com.