

### Specification:

Lamp Type	LED
Emergency Operation	90 minutes
Electrical Data, 120VAC	60Hz, 0.148A, 3.0W
Electrical Data, 277VAC	60Hz, 0.131A, 2.8W


### Listings & Certification:



### Model: FHNY23



### Mechanical Data:

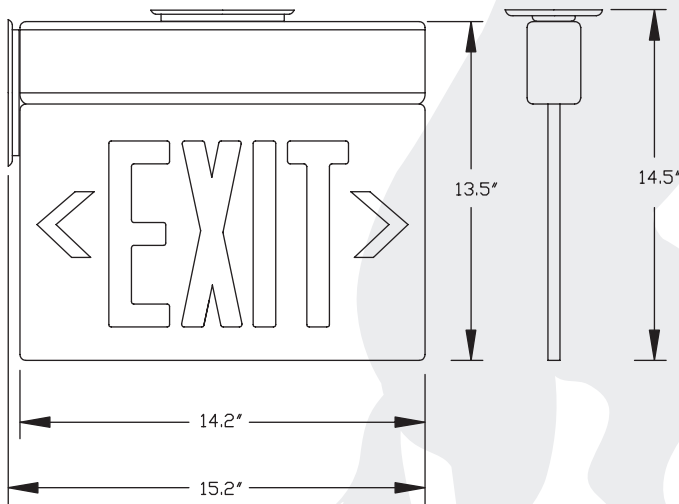

### Standard Features:

- Push-To-Test Switch
- LED Charge Indicator
- Maintenance Free, 6V Sealed Lead-Acid Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mount
- Graduated Depth of Molded Letters Provides Uniform Light Distribution on Graphics
- Mirror Divider on Double Face Versions
- Field Applied Chevron Directional Indicators
- AC and EM Models
- High-Polish, Injection-Molded Virgin Acrylic Panel, Ultrasonically Welded to Eliminate Visible Hardware
- New York City Approved

### Ordering Information:

Base Model No.	Case Color	Number of Faces	Operation
FHNY23	A - Aluminum	S - Single	AC - AC Only
	W - White	D - Dual	EM - Battery Backup
	B - Black		

Build part number by adding Base Model No., one each of Case Color, Number of Face Plates, and Operation codes. Example: FHNY23-A-S-AC