



# Specification Sheet :FLPL10 SERIES

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Model No.: \_\_\_\_\_

Remarks: \_\_\_\_\_

## Specifications:

NO additional electrical or mechanical source required.  
 Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

UL 924 Emergency Lighting and Power Equipment Listed through ETL;  
 Meets NFPA Life Safety Code 101 and OSHA requirements;  
 International Building Code 2009; International Fire Code 2009

## Listings & Certifications:




## Model: FLPL10



## Mechanical Data:

Multiple Mounting Positions Shown

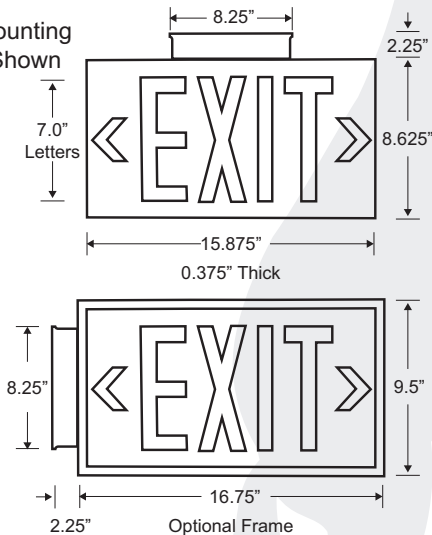

## Standard Features:

- High Illumination Non-Electric Photoluminescent Technology
- Non-Radioactive, Non-Toxic, Flame Retardant Materials
- Impact-Resistant, Waterproof
- Long Life Corrosion-Proof Construction (20 Yrs. Est.)
- High Visibility In Total Darkness And Smoke Filled Conditions
- Field Applied Directional Chevrons
- Suitable For Floor Proximity Installation
- 100 Ft Viewing Distance
- Abs Plastic Construction With Photoluminescent Lettering
- Lead Points Qualified
- Both High And Low Location Approved
- Can Be Relocated If Path Of Egress Changes
- Designed For Surface, Flag And Ceiling Mount With Optional frame and mounting bracket.

## Ordering Information:

| Base Model No. | Number of Faces | Background Color | Frame Color            |
|----------------|-----------------|------------------|------------------------|
| FLPL10         | S - Single      | W - White        | B - Black              |
|                |                 | B - Black        | R - Red                |
|                |                 | G - Green        | G - Green              |
|                | D - Dual        | G - Green        | S - Silver Powder Coat |
|                |                 | R - Red          | W - White              |
|                |                 | R - Red          | Blank - No Frame       |

Build part number by adding Base Model No., one of each Number of Faces, Background Color and Frame Color. Example: FLPL10-D-G-S

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
 Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.