

# natural<sup>led</sup>

Turning Light into Savings ▶▶▶

LED TUBE  
120-277 VOLT

**LONG LIFE**  
50,000 hrs Rated



cUL/ ETL Listed



- ▶ Retrofit for T8 & T12 Fluorescent Tube
- ▶ Excellent Color Consistency
- ▶ No Flickering/ Noise-Free Design
- ▶ 50,000 Hours Rated Average Life
- ▶ 5 Year Warranty
- ▶ Uniformed and Consistent Color
- ▶ Excellent Thermo Control
- ▶ High Efficient Driver Inside
- ▶ Highly Uniform Light Beams
- ▶ Saving Energy Up to 60%
- ▶ Low Lumen Depreciation
- ▶ Environmentally Friendly (No Mercury/ No Lead)
- ▶ ETL Listed/cUL Compliance to North American Safety Standards

**APPLICATIONS:** Hotels, Conference & Meeting Rooms, Factories & Offices, Commercial Complexes, Residential & Institution Building, School & Universities, Hospital



**ELEVATE** YOUR **LIGHTING** EXPERIENCE





## ■ 120-277 Volts (Line Voltage)

18W


| Item Code | Description      | Color Temp | Lens    | Beam Angle | Lumens Output | Equivalent Wattage | Efficiency Lumens Per Watt | CRI  | Wiring Method | DLC |
|-----------|------------------|------------|---------|------------|---------------|--------------------|----------------------------|------|---------------|-----|
| 5648      | LHO-18T8/741     | 4100K      | --      | 120°       | 1600          | 34W T12            | 89 LPW                     | > 70 | A             | --  |
| 5649      | LHO-18T8-750     | 5000K      | --      | 120°       | 1700          | 34W T12            | 94 LPW                     | > 70 | A             | --  |
| 5717      | LED18T8/CL22/840 | 4000K      | Clear   | 120°       | 2200          | 34W T12            | 122 LPW                    | 82   | B             | YES |
| 5718      | LED18T8/FR21/840 | 4000K      | Frosted | 120°       | 2100          | 34W T12            | 122 LPW                    | 82   | B             | YES |
| 5725      | LED18T8/CL22/850 | 5000K      | Clear   | 120°       | 2200          | 34W T12            | 122 LPW                    | 83   | B             | YES |
| 5719      | LED18T8/FR21/850 | 5000K      | Frosted | 120°       | 2100          | 34W T12            | 122 LPW                    | 83   | B             | YES |
| 5773      | LED18T8/FR19/850 | 5000K      | Frosted | 120°       | 1900          | 34W T12            | 105 LPW                    | 83   | B             | --  |
| 5775      | LED18T8/FR19/840 | 4000K      | Frosted | 120°       | 1900          | 34W T12            | 105 LPW                    | 83   | B             | --  |

## ■ Illuminance Distribution

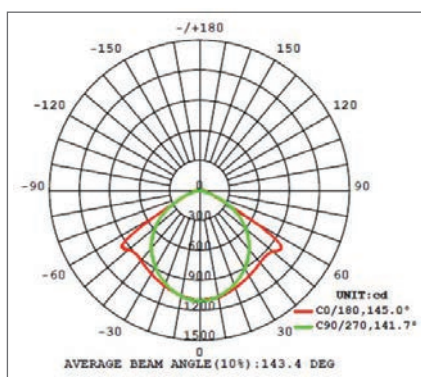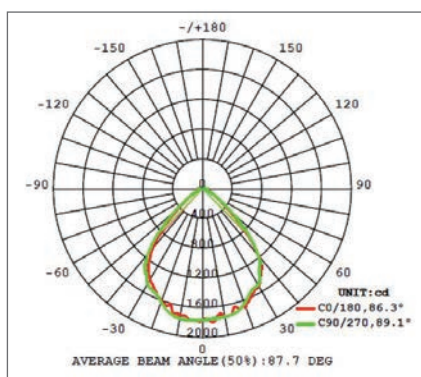


## ■ Packaging

Inner/ Outer Carton: 1/10

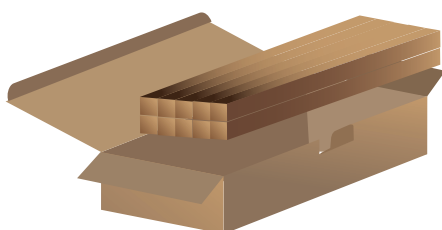


## ■ Wiring Methods

### Method A - Two Sides Connecting



### Method B - One Side Connecting

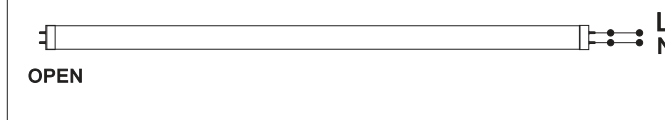

## ■ Installation Instruction



10 min.

Easy direct replacement  
**TOTAL INSTALLATION TIME**

For our detailed Installation guide PDF- please visit our website;  
[www.mynaturalLED.com](http://www.mynaturalLED.com)