

DESCRIPTION


| | | | |
|-------------------------------------|------------------------------------|---|--|
| CATALOG: E-725-U-224-R1-S | BALLAST TYPE: Electronic | STARTING METHOD: Programmed Rapid Start | NUMBER OF LAMPS - LAMP TYPE: 1 ó 2 F24T5, 1 ó 2 FC9T5, 1 F39T5, 1 FC12T5 |
|-------------------------------------|------------------------------------|---|--|

ELECTRICAL CHARACTERISTICS

| | | | | | | | |
|---|--|-----------------------------------|--|---------------------------|----------------------------------|---------------------------------|--------------------------|
| INPUT VOLTAGE: 120 - 277 V~ +/- 10% | LAMP WATTS: 22, 24, 39, 40 W | INPUT WATTS: 22 to 50 W | INPUT CURRENT: 0,436 - 0,185 A | OCV: 900 V~ Min | PF: > 0,98 | FREQUENCY: 50 / 60 Hz | SOUND RATED: A |
| MIN START TEMP: 32°F / 0°C | CLASS: P | TYPE: 1 outdoor | BALLAST FACTOR: 90% | BEF: 1,8 | LAMP CONNECTION: Serie | THD (1): < 15 % | NO PCB'S |

(1) FOR 2-F24T5

PHYSICAL CHARACTERISTICS
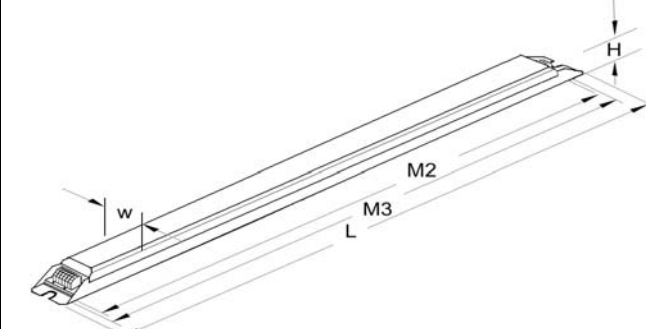
|  | CASE DIMENSIONS | | | | | | |
|---|-----------------|-------|---------|--------|--------|--------|--------|
| | UNITS | M1 | M2 | M3 | W | L | H |
| | INCHES | N/A | 16,0625 | 16,375 | 1,1875 | 16,5 | 1,125 |
| | TOL(+/-) | | 0,0125 | 0,0125 | 0,0125 | 0,0125 | 0,0125 |
| | MM | N/A | 407,9 | 415,9 | 30,2 | 419,1 | 28,6 |
| | TOL(+/-) | | 0,31 | 0,31 | 0,31 | 0,31 | 0,31 |
| LEAD LENGTH | | | | | | | |
| UNITS | BLACK | WHITE | RED | BLUE | BLUE | | |
| INCHES | N/A | N/A | N/A | N/A | N/A | | |
| TOL(+/-) | | | | | | | |
| MM | N/A | N/A | N/A | N/A | N/A | | |
| TOL(+/-) | | | | | | | |

CARTON CHARACTERISTICS

| | | | | | | |
|------------------------------|---|--------------------------|--|---------------------------------|---|---------------------------------|
| UNITS/CARTON 10 | CARTONS/LAYER 14 | # OF LAYERS 10 | UNITS/PALLET 1400 | PIECE WEIGHT 0,57 Kg. | CARTON WEIGHT 5,9 Kg. | PALLET WEIGHT 848 Kg. |
| CARTONS/PALLET 140 | CARTON DIMENSIONS 44,5 x 17,3 x 7,5 cm. | | PALLET DIMENSIONS 8,8 x 121,1 x 75,1 cm. | | PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 101,6 x 121,9 x 76,2 cm. | |

MISC.

| |
|--|
| |
|--|

CARTON LABEL

ISB SOLA BASIC

CAT. E-725-U-224-R1-S

VOLTAGE 120/277 0.436/0.185 A

50/60 Hz UNIT 10


FOR: 1 OR 2 LAMPS F24T5
1 OR 2 LAMPS FC9T5
1 LAMP F39T5
1 LAMP FC12T5

PROGRAMMED RAPID START
ELECTRONIC BALLAST

ISO 9001:2000

UL LISTED 5P 49 SR LRT08469 MADE IN MEXICO 10 851-08348E

ELECTRICAL DIAGRAM

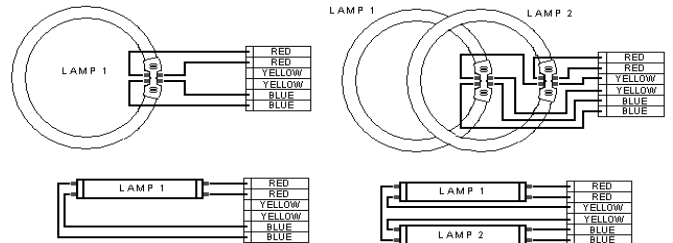

PRODUCT LABEL

SOLA

PROGRAMMED RAPID START ELECTRONIC BALLAST

E-725-U-224-R1-S

CLASS P INHERENT THERMAL PROTECTION TYPE 1 OUTDOOR

5 YEAR WARRANTY SOUND RATED A

NO PCB'S MINIMUM STARTING TEMPERATURE: -18°C (0°F) EOL PROTECTION

GROUND BALLAST CASE MOUNT LAMPS, WITHIN 1" OF GROUND FOR ALL APPLICATIONS. WITH NATIONAL AND LOCAL ELECTRICAL CODES.

CAUTION: HAZARDOUS VOLTAGE! DISCONNECT LINE VOLTAGE BEFORE INSTALLING OR REPAIRING. LAMP/HOLDER RATING: 120 W-60V

USE 18 AWG SOLID COPPER WIRE 600V RATED ONLY, STRIPPED TO 6.35"



ISO 9001:2000



Lighting and Power Source
2840 Keller Springs Road,
Suite 1102 & 1103
Carrollton, TX 75006 - 4832
Tel : (888) 385-4448
Fax : (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.