

naturalled®

Turning Light into Savings ▶▶▶



E26 socket adaptors included



- ▶ Retrofit for 4" and 6" standard cans
- ▶ Energy Star Qualified Product
- ▶ Warm White/ Traditional Light Color
- ▶ 35,000 Hours Rated Average Life
- ▶ 3 Year Warranty
- ▶ Uniformed and Consistent Color
- ▶ High-Powered LED array
- ▶ Suitable for Indoor or Outdoor Locations (UL Damp Locations)
- ▶ Long Life, Low Maintenance
- ▶ Build in power connector for Easy Installation
- ▶ Torsion clips to secure in place
- ▶ Compatible with most Incandescent dimmers*
- ▶ UL/cUL Listed



APPLICATIONS: Hospitality, Office, Residential, Stores and Supermarkets



ELEVATE YOUR LIGHTING EXPERIENCE

* For more compatibility information about the dimmers, please visit our website for more informations; <http://www.mynaturalLED.com>

**Please check with our representatives for more information on the optional adaptor (GU24).







	Item Code	Description	Lumens	Size	Color Temp	Efficiency	Power Factor	Life Hours	CRI	Air Tight	
9W	7092	LED4RL-56L30K	560	4"	3000K	60	>0.95	35,000	80	YES	YES
13W	7094	LED6RL-88L30K	880	6"	3000K	60	>0.95	35,000	80	YES	YES

■ 4" Recessed Can




■ 6" Recessed Can

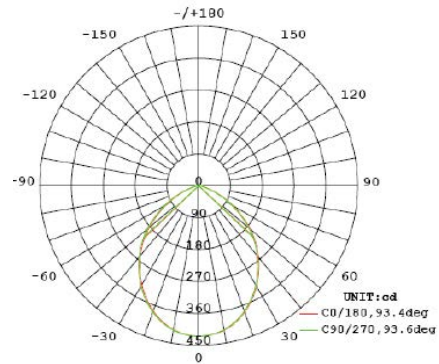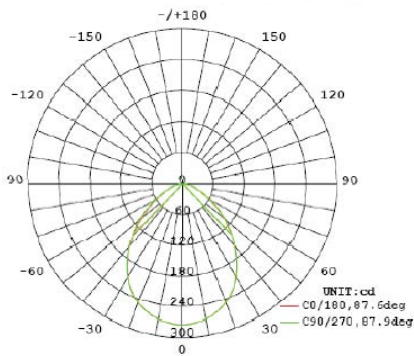

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I _{max}):	87.6	87.8	87.9	87.7	87.8
Field Angle (10% I _{max}):	138.9	139	138.9	138.8	138.9

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I _{max}):	93.4	93.5	93.6	93.6	93.5
Field Angle (10% I _{max}):	139.4	139.5	139.4	139.4	139.4

■ Installation



E26

- ❶. Disconnect all power prior to installation. Remove the existing trim and bulb. You may have access to the socket.
- ❷. Screw in the E26 socket adaptor into the open socket
- ❸. Plug in the quick connector to the LED trim.
- ❹. Once connector is attached, gently push trim into fixture opening until flush with ceiling.