UC 2x4 ft. Low Profile Center Basket T5/T8

FEATURES & SPECIFICATIONS

INTENDED USE

Low profile dedicated to T5 or T8 lamping is ideal for shallow plenum spaces. Specification grade, direct / indirect center diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment. Choice of perforated basket or linear ribbed lens.

SIZE W x L x H in inches

23.7"W x 47.7"L x 3.25"D

LAMP

2 or 4 lamp postions

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white re-flectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal. One diffuser is perforated to maintain even brightness, and provided with an internal, acrylic overlay to obscure lamps. Second diffuser is ribbed acrylic lens provides increased light output.

- Direct / indirect mimics "sky light" appearance
- Matte white reflective surfaces for soft, uniform light distribution
- Recessed perforated center diffuser with acrylic overlay.



MOUNTING

Recessed inverted T-Bar ceilings. Grid mount.

LISTING

Fixture and Ballast: UL Listed.

Ballast: Thermally protected, class P, HPF,

Non PCB.


TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

POST PAINTED

Example: UCPF228MV

ORDERING INFORMATION

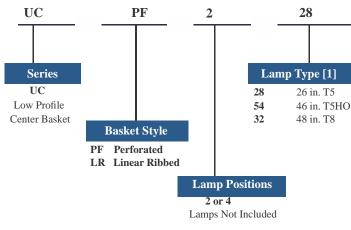


Notes:

[1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.

X1 X2

- [2] HiLume and multivolt dimming ballasts available for T8 lamps only.
- [3] Dimming ballasts available for T8 & T5HO lamps only.

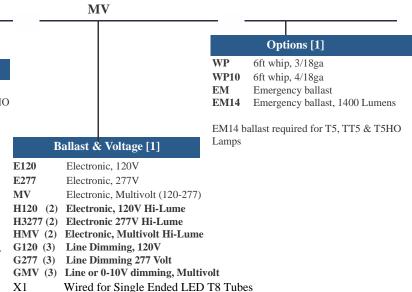

Wired for Double Ended LED T8 Tubes

Catalog Number:
Notes:


UC 2x4 ft.

Low Profile Center Basket T5/T8



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

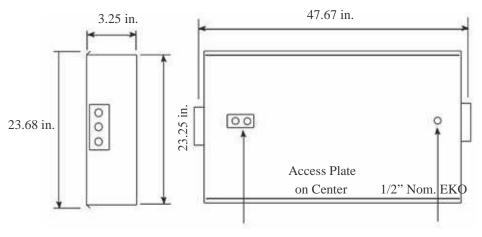

Catalog Number:

Notes: