

BR30 13W DIM. TITANIUM LED CRI^{SP} SERIES 3.0



CRI^{SP}



HIGH CRI



LED TECHNOLOGY

13W REPLACES



65W
Inc.

80% Energy Savings

\$178 Savings
per lamp*

- Meets CEC's California Quality Spec
- Exceptional color rendering CRI 92
- Richer reds and natural skin tones (R9 60, R13 98)
- Tight LED binning for consistent CCT across all lamps
- Sleek lightweight design
- Extra long 40,000 hour lifetime



LM 79


LM 80

TM 21



COLOR RENDERING INDEX & CALIFORNIA QUALITY SPEC

CRI Values R1-R14

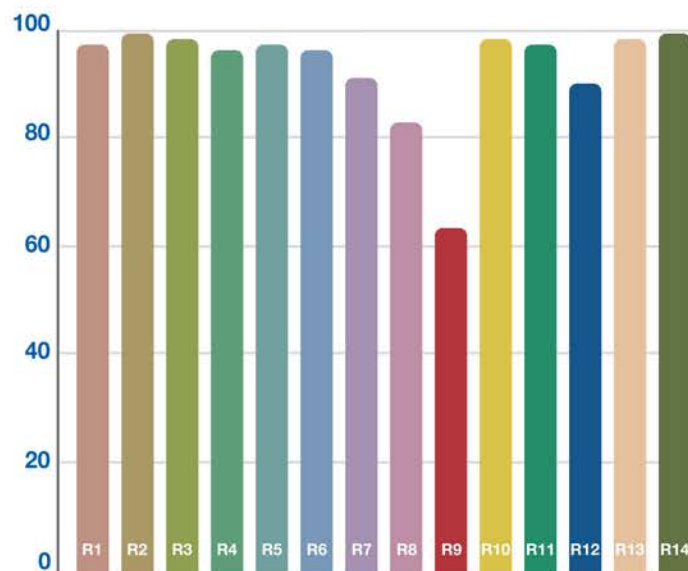

The CRI^{SP} SERIES BR30 13W lamp features the latest in color rendering LED technology. With a typical CRI 92, R9 60, and R13 98, this high-performance lamp provides crisp and vibrant colors across the whole spectrum.

CRI is calculated by taking the average value from colors R1-R8. So while some LEDs may claim to have a high CRI, they may do a poor job portraying other key colors like R9 (reds) and R13 (skin tones).

The CRI^{SP} SERIES BR30's exceptional R9-R14 values (R9 60, R13 98) provide redder reds, natural looking skin tones, and whiter whites. This lamp is not only ENERGY STAR qualified but also meets the more stringent California Quality Specification set forth by the California Energy Commission (CEC).

In addition to requiring a CRI of 90 or above, the California Quality Spec demands color temperatures fall within a 4-step Macadam ellipse to ensure minimal color deviation across lamps.

More CEC information available at www.gc-lighting.com

Lighting facts Per Bulb, **Brightness** 700 lumens

Estimated Yearly Energy Cost \$1.57

(Based on 3 hrs/day, 11 ¢/kWh, Cost depends on rates and use)

Life 36.5 years (Based on 3 hrs/day), **Energy Used** 13 watts

Light Appearance 2700K

BR30 13W DIM. TITANIUM LED CRI^{SP} SERIES 3.0



APPLICATIONS

General Lighting



Recessed Lighting



Accent Lighting



SPECIFICATIONS

Product Model 40642
13BR30G3DIM/927

Type	BR30
Base	E26
Power (W)	13
Voltage - Frequency	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K
CRI (Ra) (typ.)	92
R9 / R13 (typ.)	60 / 98
Typical lumens (lm)	700
Efficacy (LPW)	54
Beam Angle	110°
Dimmable	Yes**
Power Factor	0.9
Rated Lifetime - L70 (hrs.)	40,000
Dia. x MOL	3.74"x5.31" (95x135mm)
Weight (lb. / g)	0.52lb. / 240g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 Incandescent with 1000 hour lifetime, \$35 LED with 40,000 hr lifetime

** List of tested dimmer switches available on website

*** Not intended for use in totally enclosed fixtures

**** Suitable for damp locations. Not for use where directly exposed to weather or water