

CREATING BEAUTY

TCP has a **20-year** history in energy-efficient lighting.

Thanks to our **cutting edge technology** and deep manufacturing

expertise, we have shipped literally billions of high quality lamps and

our **integrated technology** and manufacturing

provides **expedited time-to-market**. With TCP, you can

count on unique lighting products designed to meet very specific needs –

lighting that transforms your surroundings and envelopes you in warmth –

lighting that generates beauty with every flip of the switch.

LED

For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188



Elite A-Lamp

High efficiency A-Lamps. Light output in all directions to suit many applications.

Limitless options for the following applications:

- Table Lamps
- Floor Lamps
- Sconces
- Ceiling Fixtures

Great features and benefits:

- Energy Efficient: 80% more efficient than halogen alternatives.
- Smooth, uniform dimming; also available as non-dimming.
- Long life: 25,000 hours
- Replaces 40W and 60W incandescents.
- 230° full light distribution.
- NEW smooth outer housing.
- Excellent Color consistency and high color rendering (CRI).
- Available in 2400, 2700K, 3000K and 4100K.



11W A-Lamp



7W A-Lamp



we know light.™

TCP, Inc.
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com
©TCP, Inc. JULY 2013/50959





ELITE Series


LED A-Lamp

LED 25,000 Hours average rated life, 120 Volts


Applications:

Ideal for applications where uniform multi-directional light output is required.

- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures

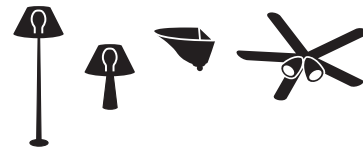

Features	Benefits
Up to 85% less energy than halogen alternatives	Instant energy savings
Long life	Minimizes replacement and maintenance costs
Smooth, clean outside housing	Seamlessly blends into lighting applications.
Very low heat generation	Perfect for sensitive display lighting such as art galleries.
Excellent Color Consistency and CRI	Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp.
UL approved for damp location	Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors.
Shatter resistant	Lower the risk of injury and breakage
ANSI construction compliant	Fits all A-Lamp sockets

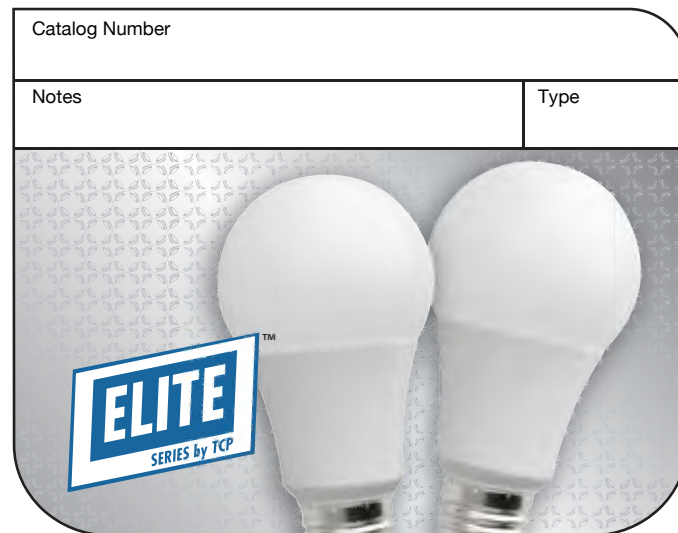

Specifications

Input Line Voltage: 120 VAC

Input Power See Chart


Input Line Frequency 50/60HZ

Lamp Life (Rated) 25,000 hrs

Minimum Starting Temp -30°C

Maximum Operating Temp..... 40°C

CRI 82

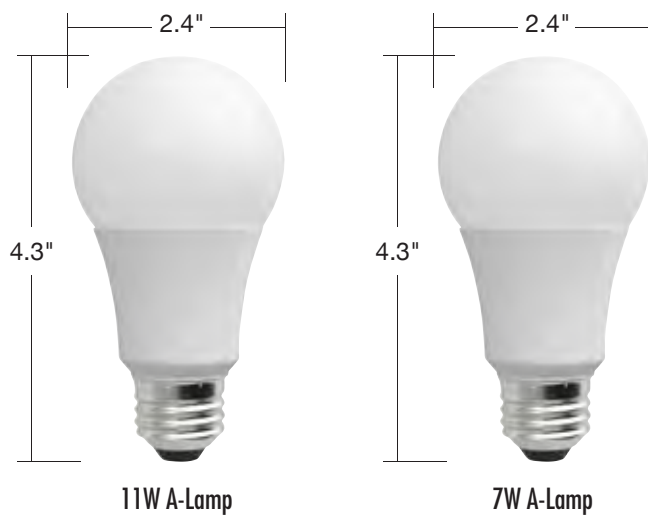

5 YEAR WARRANTY*


For the most up-to-date specs, please visit www.tcpi.com

*Based on 12 hours use per day



ELITE Series

LED A-Lamp

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Incandescent Wattage Comparison	Lumens	LPW	CCT	CRI	M.O.L. (inches)	Diameter (inches)	Case Quantity
 5 YEAR WARRANTY* For the most up-to-date specs, please visit www.tcpi.com <small>*Based on 12 hours use per day</small>	Smooth Uniform Dimming – 230° full light distribution											
	11W A-Lamp											
	LED11A19D24K	Dimmable 11W Smooth A19 - 2400K	120	11	60	800	72.7	2400K	82	4.3	2.4	12
	LED11A19D27K	Dimmable 11W Smooth A19 - 2700K	120	11	60	800	72.7	2700K	82	4.3	2.4	12
	LED11A19D30K	Dimmable 11W Smooth A19 - 3000K	120	11	60	850	77.3	3000K	82	4.3	2.4	12
	LED11A19D41K	Dimmable 11W Smooth A19 - 4100K	120	11	60	900	81.8	4100K	82	4.3	2.4	12
	7W A-Lamp											
	LED7A19D24K	Dimmable 7W Smooth A19 - 2400K	120	7	40	450	64.3	2400K	82	4.3	2.4	12
	LED7A19D27K	Dimmable 7W Smooth A19 - 2700K	120	7	40	450	64.3	2700K	82	4.3	2.4	12
	LED7A19D30K	Dimmable 7W Smooth A19 - 3000K	120	7	40	475	67.9	3000K	82	4.3	2.4	12
	LED7A19D41K	Dimmable 7W Smooth A19 - 4100K	120	7	40	500	71.4	4100K	82	4.3	2.4	12
	Non-Dimmable Options – 230° full light distribution											
	11W A-Lamp											
	LED11A1927K	Non-Dimmable 11W Smooth A19 - 2700K	120	11	60	800	72.7	2700K	82	4.3	2.4	12
LED11A1930K	Non-Dimmable 11W Smooth A19 - 3000K	120	11	60	850	77.3	3000K	82	4.3	2.4	12	
7W A-Lamp												
LED7A1927K	Non-Dimmable 7W Smooth A19 - 2700K	120	7	40	450	64.3	2700K	82	4.3	2.4	12	
LED7A1930K	Non-Dimmable 7W Smooth A19 - 3000K	120	7	40	475	67.9	3000K	82	4.3	2.4	12	

