




LS12075EN-277

75 VA Auto-Transformer

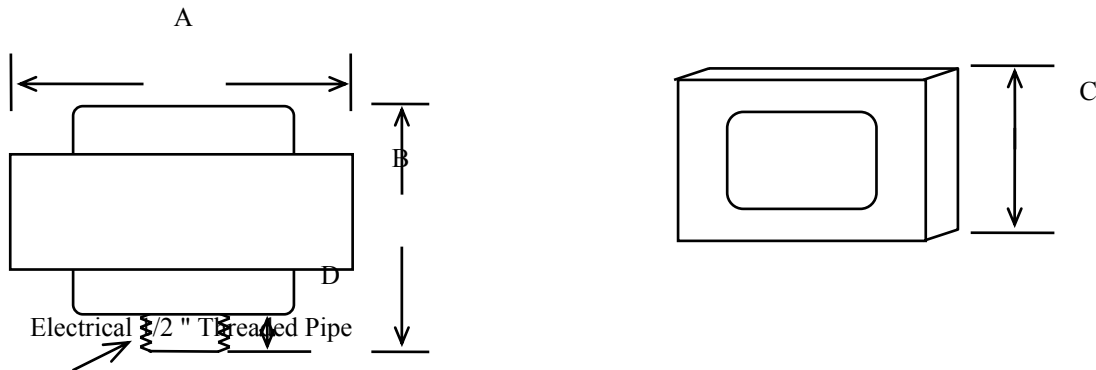

Dimension

A	B	C	D
2.625	3.00	2.187	0.500
Dim. in inches			
To Connect:			

277 V 60 Hz

orange


White: Common, to be used for both voltages.

IE: 277V connect White with Orange (Input)

120V connect White with Black (Output)

Sec.
120 V 625 mA

0 V



Primary Voltage : 277 Volts 60 Hertz

No Load Primary Current : < 60 mA

No Load Secondary Voltage : 126 Volts \pm 3.00 Volts

Full Load Secondary Voltage : 120 Volts \pm 3.00 Volts

Temperature Class : Class B (130° C)

Thermal Protection : none

Dielectric Strength : 2500 Volts between primary and core, primary and secondary, secondary and core

UL recognized

CSA approved