
Wall Mount Series TIE

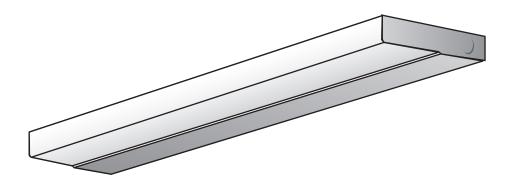

Intended Use High Performance Undercabinet Light.

FEATURES & SPECIFICATIONS

Specifications

- Knockouts provided on cover for optional convenience outlet.
- Knockouts provided on side and back for power feed.
- Keyhole mounting slots provided on back.
- •1/2" Power connector included.
- •Completely wired, ready for installation.
- Comes complete with switch in box & conduit connector with lamps.

Electrical

UL listed 120V power factor corrected electronic ballast.

- No annoying lamp flickering during start up Instant On!
- Energy efficient electronic ballast lower operating
- •Cooler operation as much as 60% less than conventional pre-heat ballast.
- Quieter eliminates ballast noise.
- •No starter required.

Housing

Die formed housing of sturdy 20 gauge steel.

Diffuser

One piece extruded ribbed white diffuser designed to snap-out fOR easy installation and relamping.

Finish

All metal surfaces are specially treated for rust resistance and better paint adhesion, then electrostatically sprayed with high white enamel of 87% reflectance and baked at 375 for maximum durability.

Listing

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.


Optional Equipment

- Grounded convenience outlet
- GLR fuse and fuse holder
- Lamps
- •6 foot, 3 conductor power cord


Wall Mount

Series TIE

DIMENSIONS



Note: Dimensions subject to change without notice. Please contact factory for verification



ORDERING INFORMATION

SERIES TIE		
Part Number	Bulb	<u>Size</u>
TIE 108 SLN	1-F8T5	12-1/4" X 5" X 1"
TIE 113 SLN	1-F13T5	21-1/4" X 5" X 1"
TIE 208 SLN	2-F8T5	24-1/2" X 5" X 1"
TIE 813 SLN	1-F8T5 & 1-F13T5	33-1/2" X 5" X 1"
TIE 213 SLN	2-F13T5	42-1/2" X 5" X 1"

S - 120V Residential Ballast

LN - Lamp included in Cool White