




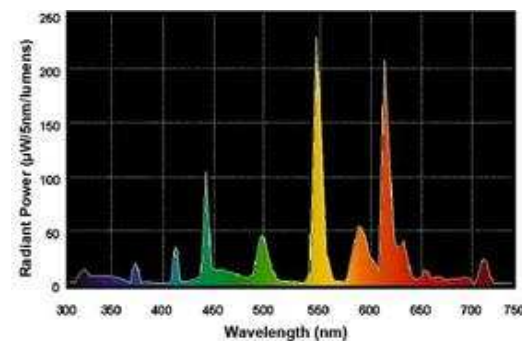
Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 97612**97612 – F26DBX/835/ECO4P**

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse


 High Color Rendering
Energy Savings
GENERAL CHARACTERISTICS

Lamp type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G24q-3
Wattage	26
Voltage	105
Rated Life	12000 hrs
Starting Temperature (MIN)	0 °C (32 °F)
Cathode Resistance	2.700 Ohm
LEED-EB MR Credit	232 picograms Hg per mean lumen hour
Rated Life (rapid start) @ Time	20000 h @ 12 h
Additional Info	Dimmable with appropriate dimming ballast., End of Life Protection (EOL), TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

[View Larger](#)**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution****PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	1710
Mean Lumens	1440
Nominal Initial Lumens per Watt	65
Color Temperature	3500 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Current (max)	5.2500 A
Open Circuit Voltage (after preheating) (MAX)	240 V
Open Circuit Voltage Across Starter (MIN)	198 V
Lamp Current	0.325 A
Preheat Voltage (MIN)	4 V
Current Crest	1.7

Factor (MAX)

Supply Current Frequency	60 Hz
--------------------------	-------

DIMENSIONS

Maximum Overall Length (MOL)	6.4000 in (162.5 mm)
------------------------------	----------------------

Nominal Length	6.400 in (162.5 mm)
----------------	---------------------

Base Face to Top of Lamp	5.800 in (147.3 mm)
--------------------------	---------------------

PRODUCT INFORMATION

Product Code	97612
--------------	-------

Description	F26DBX/835/ECO4P
-------------	------------------

ANSI Code	60901-IEC-2562-2
-----------	------------------

Standard Package	BUNDLE
------------------	--------

Standard Package Quantity	50
---------------------------	----

Sales Unit	Unit
------------	------

No Of Items Per Sales Unit	1
----------------------------	---

No Of Items Per Standard Package	50
----------------------------------	----

UPC	043168976121
-----	--------------

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
71434	GEC218-MVPS-3W	1	99.0	1.0
71432	GEC218-MVPS-BES	1	99.0	1.0
71433	GEC218-MVPS-SE	1	99.0	1.0
71445	GEC226-MVPS-3W	1	99.0	1.0
71443	GEC226-MVPS-BES	1	99.0	1.0
71444	GEC226-MVPS-SE	1	99.0	1.0

 CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

[Return To Top](#)

[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2009