





Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 15867**15867 – F39BXSPX35RS10PK**

GE Biax® T5 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse


 High Color Rendering
Energy Savings
[View Larger](#)**GENERAL CHARACTERISTICS**

Lamp type	Compact Fluorescent - Plug-In
Bulb	T5
Base	4-Pin (2G11)
Wattage	39
Voltage	107
Rated Life	12000 hrs
Starting Temperature (MIN)	10
LEED-EB MR Credit	332 picograms Hg per mean lumen hour
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

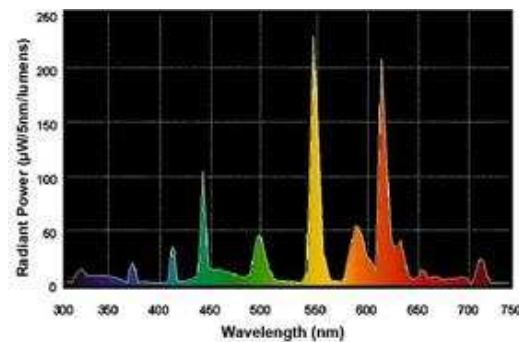ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution****PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	2850
Mean Lumens	2510
Nominal Initial Lumens per Watt	73
Color Temperature	3500 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Lamp Current	0.428 A
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	16.5000 in (419.1 mm)
Nominal Length	16 1/2

PRODUCT INFORMATION

Product Code	15867
Description	F39BXSPX35RS10PK
ANSI Code	60901-IEC-4236-1
Standard Package	Master
Standard Package GTIN	10043168158678
Standard Package	40

Quantity

Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168158671

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
47540	B239PUNV-DOG1C	1	97.0	0.98
47542	B254PUNV-DGE1C	1	99.0	1.22
99651	GE254MVPS90-F	1	99.0	
99652	GE254MVPS90-F-42	1	99.0	
99649	GE454MVPS90-E	1	98.0	
73192	GE454MVPS90-G	1	98.0	1.21
73193	GE454MVPS90-G-42	1	98.0	1.28

⚠ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life
- Life ratings for the F18BX preheat lamps are based on operating the lamp at 3 hrs per start on a preheat type circuit. Operation on rapid start and instant start ballasts is not recommended. Life ratings for all lamps are based on operating the lamp at 3 hrs per start on a rapid start type ballast. Life rating on a preheat or instant start ballast is 25% lower than other Rapid Start High Lumen Biax.

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2009