



Commercial Products &amp; Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 46703**46703 – F24W/T5/865/ECO**

GE Ecolux® Starcoat® T5




- Passes TCLP, which can lower disposal costs.

 a product of  
**ecomagination**

High Color Rendering

**GENERAL CHARACTERISTICS**

Lamp type	Linear Fluorescent - Straight Linear
Bulb	T5
Base	Miniature Bi-Pin (G5)
Wattage	24
Voltage	75
Rated Life	30000 hrs
Rated Life (rapid start) @ Time	36000 h @ 12 h 30000 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	-20 °C (-4 °F)
LEED-EB MR Credit	86 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

[View Larger](#)**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)[Disposal Policies & Recycling Information](#)**PHOTOMETRIC CHARACTERISTICS**


Initial Lumens	1880
Mean Lumens	1740
Nominal Initial Lumens per Watt	78
Color Temperature	6500 K
Color Rendering Index (CRI)	85
S/P Ratio (Scotopic/Photopic Ratio)	2.2

**ELECTRICAL CHARACTERISTICS**


Open Circuit Voltage (rapid start) Min @ Temperature	280 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

**DIMENSIONS**

Maximum Overall Length (MOL)	22.1700 in (563.1 mm)
Nominal Length	21.600 in (548.6 mm)

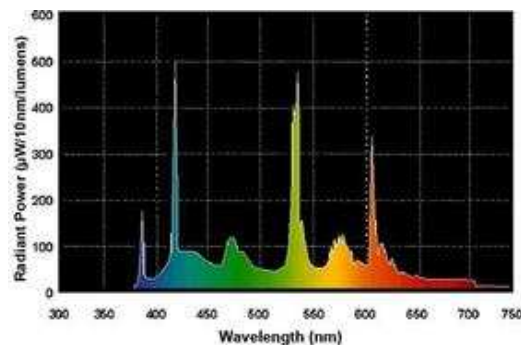**GRAPHS & CHARTS****Spectral Power Distribution****Lamp Mortality**


Bulb Diameter (DIA)	0.625 in (15.8 mm)
Bulb Diameter (DIA) (MAX)	0.670 in (17.0 mm)
Max Base Face to Base Face (A)	21.610 in (548.8 mm)
Face to End of Opposing Pin (B) (MIN)	21.790 in (553.4 mm)
Face to End of Opposing Pin (B) (MAX)	21.890 in (556.0 mm)

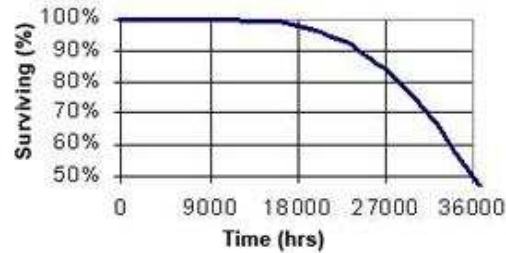

#### PRODUCT INFORMATION

Product Code	46703
Description	F24W/T5/865/ECO
Standard Package	Case
Standard Package GTIN	10043168467039
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168467032

#### Lumen Maintenance

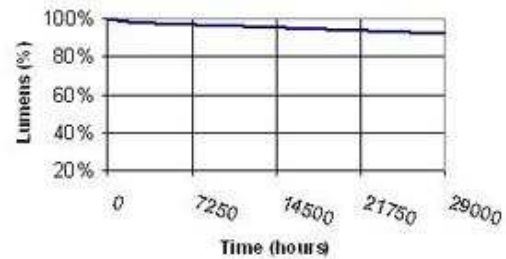

#### COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
<a href="#">47534</a>	B224PUNV-COG1C	1		0.98
<a href="#">47540</a>	B239PUNV-DOG1C	1		0.98
<a href="#">71445</a>	GEC226-MVPS-3W	2	99.0	1.0
<a href="#">71443</a>	GEC226-MVPS-BES	2	99.0	1.0
<a href="#">71444</a>	GEC226-MVPS-SE	2	99.0	1.0

#### ⚠ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map  
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2009