GE Lighting

WORLDWIDE PARTNER

Commercial Products & Solutions

Products > 97606

97606 – F26DBX/827/ECO
GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

PRINT

High Color Rendering
Energy Savings

GENERAL CHARACTERISTICS

Lamp type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G24d-3
Wattage	26
Voltage	105
Rated Life	10000 hrs
Starting Temperature (MIN)	-9 ℃ (16 ℉)
Cathode Resistance	2.700 Ohm
Additional Info	TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1710
Mean Lumens	1460
Nominal Initial Lumens per Watt	65
Color Temperature	2700 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage Across Starter (MIN)	198 V
Lamp Current	0.325 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency	60 Hz

DIMENSIONS

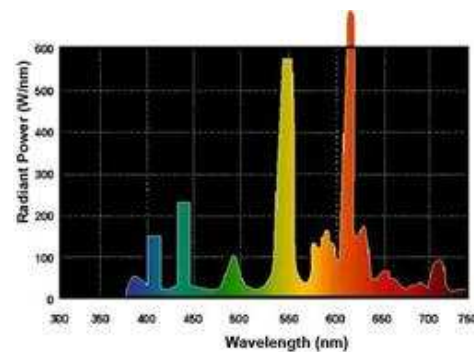|	
Maximum Overall Length (MOL)	6.6700 in (169.4 mm)
Nominal Length	6.700 in (170.1 mm)
Base Face to Top of Lamp	5.790 in (147.0 mm)

PRODUCT INFORMATION

Product Code	97606

Bulb   Base

View Larger

ADDITIONAL RESOURCES

Catalogs

Testimonials

Brochures
Product Brochures
- Ecolux
- Ecolux (Environmental)

Disposal Policies & Recycling Information

GRAPHS & CHARTS

Spectral Power Distribution

Description	F26DBX/827/ECO
ANSI Code	60901-IEC-0526-2
Standard Package	BUNDLE
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168976060

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
87700	GEM2CF24PH277	2	97.0	0.9

⚠ **CAUTIONS & WARNINGS**

See list of cautions & warnings.

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

Return To Top